

Received July 28, 2021, accepted August 10, 2021, date of publication August 12, 2021, date of current version August 19, 2021.

Digital Object Identifier 10.1109/ACCESS.2021.3104509

Survey and Performance Evaluation of Multiple Access Schemes for Next-Generation Wireless Communication Systems

A. F. M. SHAHEN SHAH¹, (Senior Member, IEEE), AHMED NIDHAM QASIM²,
MUHAMMET ALI KARABULUT³, (Member, IEEE),
HACI ILHAN¹, (Senior Member, IEEE),
AND MD. BAHARUL ISLAM⁴, (Senior Member, IEEE)

¹Department of Electronics and Communication Engineering, Yildiz Technical University, 34220 Istanbul, Turkey

²Department of Electrical and Electronics Engineering, Istanbul Gelisim University, 34310 Istanbul, Turkey

³Department of Electrical and Electronics Engineering, Kafkas University, 36000 Kars, Turkey

⁴School of Data Science and Engineering, American University of Malta, 1013 Bormla, Malta

Corresponding author: A. F. M. Shahen Shah (shahen.shah@hotmail.com)

ABSTRACT Mobile communication systems are always in continuous evolution due to the demands of the end-users using this technology. Therefore, before the possible launch of 5G, some technologies have opened the way to the new mobile communication system. The need for technologies that provide more comfort to users has led to the construction of complex communication systems that were only science fiction decades ago. The information society in which we are now immersed has been the result of constant progress over time. In this paper, a survey of multiple access schemes for next-generation wireless communication systems is presented. Multiple access schemes are reviewed for possible use in next-generation wireless communication systems such as orthogonal multiple access (OMA), non-orthogonal multiple access (NOMA), and delta-orthogonal multiple access (D-OMA), etc. General comparisons of 1G to 6G are presented. Different types of OMA are explained, and then orthogonal frequency division multiple access (OFDMA) is chosen as an example of the OMA scheme to compare with NOMA and D-OMA. There are two types of NOMA: power-domain and code-domain, which are discussed and compared. Simulation results are presented, and a comparison among different access schemes is provided.

INDEX TERMS D-OMA, multiple access schemes, next-generation wireless communication systems, NOMA, OFDMA, OMA.

I. INTRODUCTION

A multiple access scheme is a leading technology for distinguishing various wireless systems from first-generation (1G) to sixth generation (6G). The evolution of 1G to 6G is presented in Fig. 1. Frequency division multiple access (FDMA), time division multiple access (TDMA), code division multiple access (CDMA), and orthogonal frequency division multiple access (OFDMA) have been used in 1G, 2G, 3G, 4G, respectively. These are orthogonal multiple access (OMA) techniques. Various users are assigned in an orthogonal way in these multiple access systems, either time, code, or frequency domain, to prevent or mitigate inter-user interference.

The associate editor coordinating the review of this manuscript and approving it for publication was Zhenhui Yuan¹.

In OMA, the data carrying signals of the users can be conveniently isolated by deploying reasonably cost-efficient receivers at low complexity. However, OMA can support limited users because of orthogonal resources [1]. With the aim of supporting more users non-orthogonal multiple access (NOMA) is proposed. To separate the non-orthogonal signals, complexity in the receiver is increased in NOMA [2]. Recently, delta-orthogonal multiple access (D-OMA) has been suggested in 6G systems for massive access [3].

NOMA, OMA, and D-OMA have been attracted a significant amount of attention in recent years by researchers who have aimed to fulfill the wireless communication criteria of the next generation. The research trend covers numerous subjects, such as various performance analysis methods, fairness analysis, code and power domain, and user pairing. At this

TABLE 1. Difference between our survey and other survey papers of similar nature.

Survey	Method	Technique	Domain
Riazul Islam et. al [4]	NOMA	5G	Power allocation
Mohammad karimi et. al [5]	S-NOMA	5G	Code domain
Riazul Islam et. al [6]	NOMA, OFDMA	5G	Downlink, power domain
Wang et. al [7]	TDMA, FDMA, CDMA, IDMA, NOMA	3GPP	Delay-sensitive applications
Ruby et. al [8]	NOMA	5G	Power allocation
Bhaga et. al [9]	OFDMA, SC-FDMA	LTE	Uplink, downlink
Sharma et. al [10]	SDMA	5G	Power allocation
Our Survey	FDMA, TDMA, CDMA, SCMA, NOMA, OMA, D-OMA	1G, 2G, 3G, 4G, 5G, 6G	Power allocation, code domain, power domain, uplink, downlink

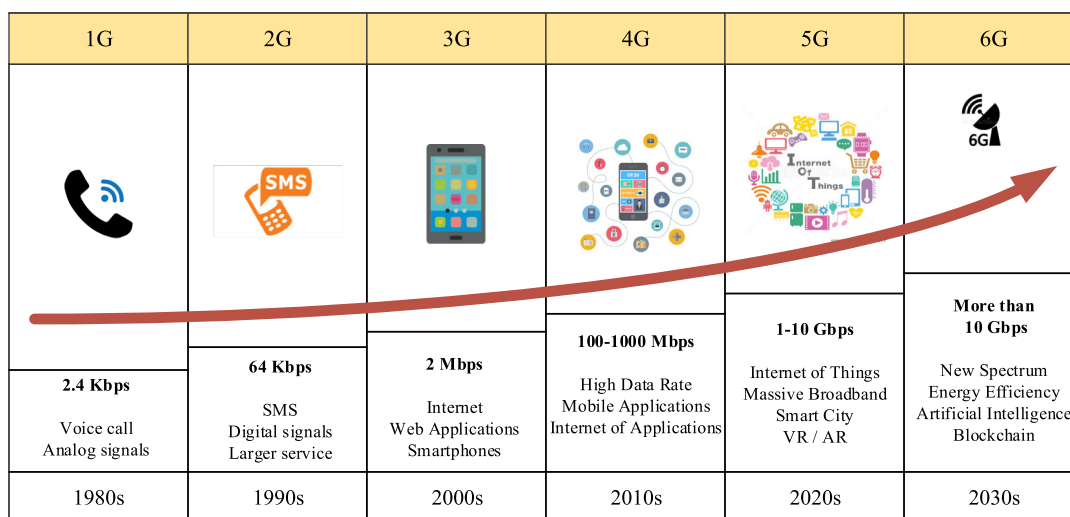


FIGURE 1. The evolution of 1G to 6G.

point, a detailed understanding of the current research state of NOMA, OMA, and D-OMA in wireless communication systems of the next century is enormously helpful for researchers who would like to do more in this area. In this article, a survey of multiple access schemes for next-generation wireless communication systems is presented. Table 1 further explains the difference between our survey and other survey papers. The contributions of this paper to the literature are outlined as follows:

- General comparisons of 1G to 6G is presented.
- OMA, NOMA, and D-OMA are reviewed.
- Different types of OMA such as FDMA, TDMA, CDMA, and OFDMA are examined. As an example of the OMA scheme, OFDMA is selected for comparison with other techniques.
- NOMA in the power domain and NOMA in the code domain are also studied. D-OMA scheme is described.
- Simulation results are presented, and a comparison among different access schemes in next-generation wireless communication systems is provided.

The remainder of the article is arranged as follows: multiple access techniques are illustrated in Section II. Section III

presents comparisons and simulation results. Finally, the conclusion is drawn in Section IV.

II. MULTIPLE ACCESS TECHNIQUE

Multiple access techniques are highly relevant since they allow users to access the means of communication and are responsible for providing service to a specific number of users simultaneously, those connected to the same medium. Therefore, multiple access is done by multiplexing users by sharing resources in time, frequency, or code. This implies that users use the same resource in an organized way, mitigating interference with other users. A review of multiple access technologies is presented in Fig. 2. Multiple access technology can be classified as OMA, NOMA, and D-OMA. FDMA, TDMA [11], CDMA [12], OFDMA [13] are OMA schemes. NOMA scheme can be divided into two types: power-domain [4]–[35] and code-domain [40]–[73]. The code-domain NOMA schemes include interleave division multiple access (IDMA) [74], low-density spreading (LDS) CDMA [40], sparse code multiple access (SCMA) [50]–[66], pattern division multiple access (PDMA) [75], multi-user shared access (MUSA) [76], etc.

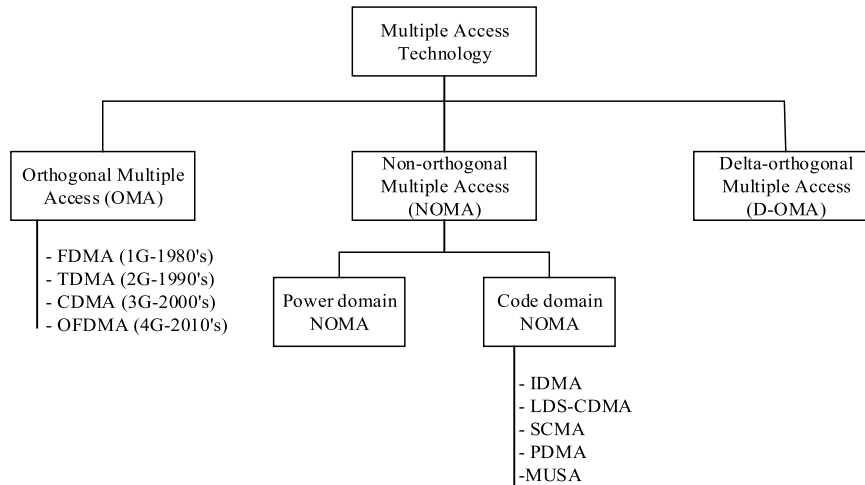


FIGURE 2. A review on multiple access technologies.

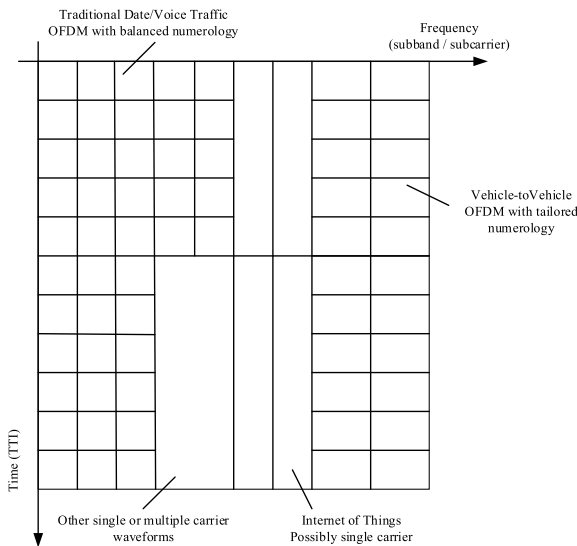


FIGURE 3. Example of OFDMA.

A. OMA

Conventional OMA access techniques allow multiple users to use resources orthogonally and share system resources simultaneously by time division, frequency, or code [3]. Thus, there is nominal interference between adjacent blocks allowing signal detection to be reasonably accessible with increasing complexity at the receiver. There are various OMA techniques, depending on how they divide the resources of the medium through which information is transmitted. The main OMA techniques are TDMA, CDMA, FDMA, and OFDMA, which are described below.

1) OFDMA

Instead of the data being transmitted as a single transmission, orthogonal frequency division multiplexing (OFDM) splits

the data into parallel sub-streams. It sends each sub-stream to a different frequency, well-known as a subcarrier. A vast number of carriers are used by OFDM, each with low bitrate data. It provides a high degree of spectral efficiency and is very resistant to selective fading, inter-symbol interference (ISI), and multipath effects. One of OFDM's key benefits is that it is more resistant than single carrier systems to selective fading. It divides the complete channel into several narrowband signals that each has sub-channels as flat fading. Though the OFDM idea was developed in the 1960s, OFDM's most significant impetus was reducing the prices of integrated circuits and the possibility of using the fast Fourier transform. OFDM is a multicarrier modulation (MCM) and frequency division multiplexing (FDM) based technique. It is possible to think of OFDM as a method for modulation or multiplexing. The elementary idea behind multicarrier modulation is to split the bandwidth of the signals into parallel subcarriers or narrow bands of the total bandwidth [13]. Fig. 3 shows an example of the OFDMA structure.

In the digital domain, the OFDM symbol is formed before transmission. Then, common digital modulations such as BPSK, 16QAM are applied to it (5G intends to use modulations up to 256QAM). Finally, this data flow is divided into N parallel flows, which become an OFDM symbol. Thus, an OFDM symbol is made up of several samples of different information flows.

$$X_k = \sum_{n=0}^{N-1} a_n e^{j\frac{2\pi kn}{N}}, \tag{1}$$

where a_n denotes the data symbol in the n th subcarrier [77]. The equation is equivalent to the n th point of the discrete inverse Fourier transform (IDTF). The spacing of the subcarriers and the frequency are chosen so that the orthogonality criterion is fully met. Orthogonality means that the average value of the multiplication of two signals at time T is zero.

This criterion deals with the equation:

$$\frac{1}{T} \int_T x(t)y(t)dt = 0. \tag{2}$$

2) TDMA

This multiple access method is based on the time-division multiplexing (TDM) scheme in which a time slot is allocated to each data stream. In the case of TDMA, each data stream corresponds to a user connected to the shared medium. In mobile communications, TDMA is used in almost all second generation (2G) schemes, highlighting global system for mobile communications (GSM). The equation below further explains the TDMA [78]

$$\eta_a = \left(\frac{\tau M_t}{T_f} \right) \left(\frac{B_u N_u}{B_w} \right), \tag{3}$$

where η_a is spectral efficiency, τ is time slot length that carries data, T_f is period of frames, M_t is the number of time slots per frame, B_u is an individual user’s bandwidth during his or her time slot, N_u is the user’s number in the system sharing the same time slot, but having access to various frequency sub-bands.

3) CDMA

While in TDMA and FDMA, the resources are divided temporarily, assigning a time slot or a frequency band only to a specific user. In CDMA, all users can transmit concurrently and in an identical frequency band. It is attained by allocating each user a code that differentiates them from the rest. The most common CDMA model is direct sequence spread spectrum CDMA (DS-SS-CDMA). The code assigned to each user is a pseudorandom number (PN) sequence that multiplies the signal corresponding to a symbol and user. The sequence breaks into chips whose duration is much less than the symbol time. The result is a signal with a noisy appearance and an expanded spectrum. When the received power P_s of all these signals is identical, the wanted signals will be interfered by $m - 1$ equal-power CDMA signals. In this manner, the RF has a carrier-to-interference ratio (C/I (dBm)) = $10\log(1/m)$, which is a negative number known as “self-impedance” brought about by the other $m - 1$ carriers that at the same time involve a similar transfer speed as the m^{th} wanted carrier. The probability of error (P_e) brought about by the self-interference of the m concurrent equivalent force got signals is given by:

$$P_e = \frac{1}{2} \operatorname{erfc} \sqrt{2 \left(\frac{1}{m-1} \right) \left(\frac{f_c}{f_b} \right)}, \tag{4}$$

where m indicates the user’s number, f_c is the bit rate of pseudo-random code, and f_b is the bit rate of the data signal. The ratio (f_c/f_b) denotes the spread of the spectrum. CDMA fixes the timing issues associated with TDMA and FDMA but is more vulnerable to the near-far problem. The 2G CDMA-One system and most 3G mobile phone systems like CDMA2000 or UMTS incorporate CDMA.

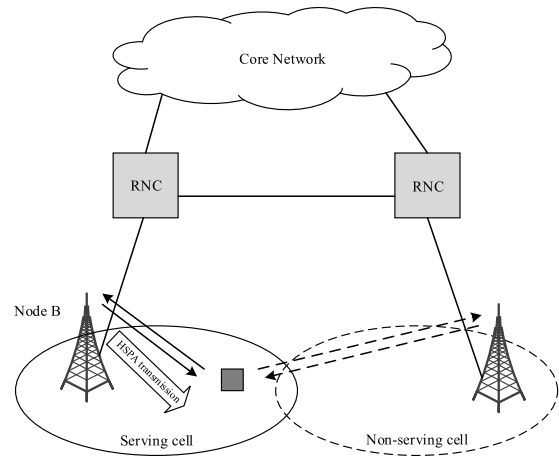


FIGURE 4. CDMA workflow.

Fig. 4 demonstrates CDMA workflow. The radio network controller (RNC) manages and controls radio resources in the Node Bs. RNC is equivalent to the base station controller (BSC) in the GSM.

4) FDMA

For this access to the medium, the bandwidth is divided among multiple users, corresponding to each of them only one or more subcarriers. OFDMA is the version of FDMA in which the subcarriers are orthogonal to each other and is an adaptation of the OFDM modulation technique for multiple access. Single carrier FDMA (SC-FDMA) is the pre-DFT encoded version of FDMA. Although FDMA techniques have the disadvantage of demanding frequency synchronization, ingenious implementations such as OFDMA and SC-FDMA have numerous benefits over TDMA or CDMA, such as multipath robustness or the elimination of costly time-domain equalization for channels with long temporal dispersions like wireless, replacing it with a much simpler frequency equalization. It can be highlighted that the ease of distribution of resources in frequency according to channel conditions, very useful in frequency selective channels such as wireless. For this reason, OFDMA and SC-FDMA are the techniques of choice for the physical layer of the radio interface of the new standard for mobile communications long-term evolution (LTE) for UMTS. Fig. 5 illustrates differences between CDMA, FDMA, and TDMA.

B. NOMA

NOMA is the multiple access method that permits users to use resources concurrently in a non-orthogonal way on a subcarrier by transmitting information on the same frequency simultaneously with diverse power levels or through code allocation [14], [15]. NOMA presents a significant impact on the decrease in latency during simultaneous transmission. This means that the resource is better used by using all the bandwidth and thus improving the spectral efficiency. In recent times, for fifth generation (5G) cellular networks,

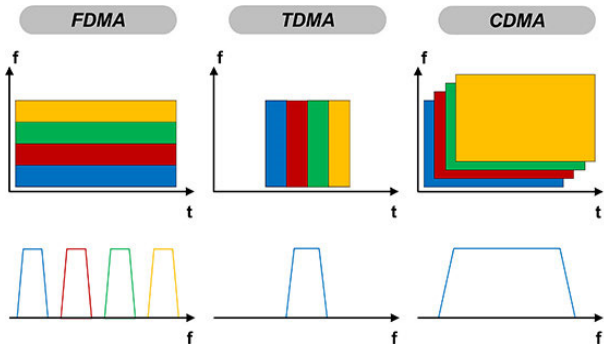


FIGURE 5. Differences among CDMA, FDMA, and TDMA.

NOMA schemes have gained considerable interest. The fundamental explanation for the adoption of NOMA in 6G is its ability to support numerous users while utilizing identical time and frequency resources. NOMA utilizes overlay encoding in the sender and successive interference cancellation (SIC) in the destination to multiplex users in the power domain. As illustrated in Fig. 6, the base station (BS) transmits overlapping signals to two users, with the first user getting a more significant channel gain than the second user. A survey of the NOMA scheme is presented in Table 2.

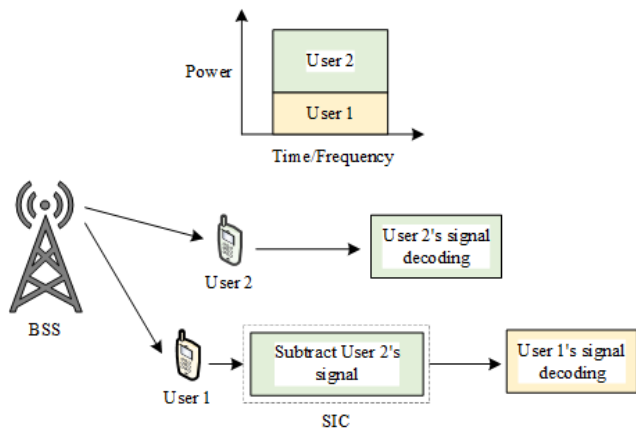


FIGURE 6. NOMA workflow.

There are numerous NOMA methods, which can be separated into two primary forms. Fig. 2 contains a basic classification of NOMA schemes that exist. In contrast to a NOMA power-domain that reaches power domain multiplexing, code-domain NOMA reaches code-domain multiplexing. Like the CDMA systems, the NOMA coding domain shares all available resources (time/frequency). Code domain NOMA, contrariwise, utilizes a user-specific sequence that is fragmented or non-orthogonal and has a low correlation coefficient cross-relation. Code domain NOMA can also be classified into a few categories: low-density CDMA (LDS-CDMA), LDS-OFDM, and SCMA. This is the only class that can break into many different classes. LDS-CDMA allows limiting the influence of interference on any chip of fundamental CDMA systems by utilizing a low-density

spreading sequence. LDS-OFDM can be considered the combined LDS-CDMA and OFDM, with symbols spread over low-density propagation sequences first and with the resulting chips sent on various subcarriers. SCMA is a modern LDS-CDMA-based NOMA code-domain technique. Unlike LDS-CDMA, data bits can be mapped directly into different sparse codewords since they combine bit mapping and bit spreading. SCMA facilitates a low-strength reception technology and increases productivity compared to LDS-CDMA. Some of the other access methods that are closely linked to NOMA include PDMA and multiple-access spatial division (SDMA) are also available. In different domains, PDMA can be performed. PDMA first maximizes diversity on the transmitter side and reduces overlaps among multiple users to the minimum for the creation of non-orthogonal patterns. The multiplexing occurs in the code domain, in the spatial domain, or a mixture of it. For SDMA, it is based on the basic CDMA systems. The working principle SDMA identifies various users by utilizing user-specific channel impulses rather than user-specific spread sequences.

NOMA integrates various wireless communication methods such as multiple input multiple output (MIMO), cooperative communications, space-time coding, beamforming, and network coding [18], [19]. It should be stated that the usage of NOMA technologies is not confined to the use of different multiplexing techniques. OFDM's NOMA application scenario is considered because of the benefits and extensive use of OFDM in today's wireless communication systems.

Since the power domain users are multiplexed, the power allocation feature in NOMA is strengthened over OMA. Interference monitoring, rate distribution, and even user entry is all influenced by the power distribution. Power allocation in NOMA specifies the user channel parameters, the availability of CSI, QoS specifications, total power constraints, and system intent. An incorrect assignment of power results in an unequal distribution of the rates between users and origins a system outage as SIC can fail. Various performance measures for power allocation include the number of users admitted, amount rate, fairness of user, probability of outage, and overall energy consumption. Therefore, the goal in NOMA should be to achieve either more users and a higher amount rate and equal power allocation under a minimum power consumption. NOMA distributes more power to users with lower channel gains with the purpose of guaranteed user fairness. Due to an additional overhead system for coordination of channel feedback and error propagation, the joint application of NOMA to all users is not feasible. The concept of a user pairing has therefore arisen, with cell users split into different clusters and NOMA used for each cluster. A NOMA system relies heavily on user pairing as well as power distribution. In NOMA, the distribution of resources attempts to classify the users to be paired and the power to be assigned to each user by each cluster. A detailed search for all possible user pairs and a computationally complex allocation of power will achieve optimal NOMA resources allocation.

TABLE 2. A survey of NOMA schemes.

No	NOMA techniques	Company	Full Form	Uplink (UL)/ Downlink (DL)
1	Power-domain NOMA [4-35]	DCM	Power-domain non-orthogonal multiple access	UL/DL
2	SCMA [50-66]	Huawei	Sparse code multiple access	UL/DL
3	PDMA [75]	CATT	Pattern division multiple access	UL/DL
4	MUSA [76]	ZTE	Multi-user shared access	UL/DL
5	LSSA [81]	ETRI	Low code rate and signature based shared access	UL
6	RSMA [82-84]	Qualcomm	Resource spread multiple access	UL
7	IGMA [85]	Samsung	Inter-leave grid multiple access	UL/DL
8	IDMA [74], [86]	Nokia	Interleave division multiple access	UL
9	NCMA [87]	LGE	Non-orthogonal coded multiple access	UL
10	NOCA [88]	Nokia	Non-orthogonal coded access	UL
11	GOCA [89]	MTK	Group orthogonal multiple access	UL
12	RDMA [89]	MTK	Repetition division multiple access	UL
13	LDS-SVE [40], [90]	Fujitsu	Low density spreading-signature vector extension	UL/DL
14	FDS [91]	Intel	Frequency domain spreading	UL
15	LCRS [92]	Intel	Low code rate spreading	UL

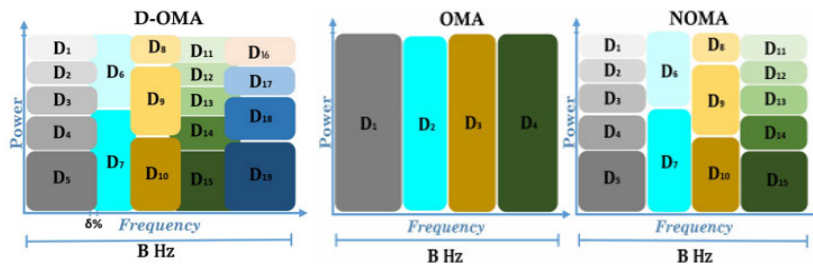


FIGURE 7. D-OMA, NOMA and OMA frequencies.

In downlink NOMA, decoding of signals in UEs is performed in the order of decreasing ratio values $|h_i|^2$. Under this criterion, it is assumed that the UE- i can eliminate inter-user interference from UE- j si $|h_j|^2 < |h_i|^2$. In the case of 2 users, if $|h_1|^2 > |h_2|^2$ the UE-2 decodes the signal first, so there is no interference cancellation. For its part, the UE-1 decodes the signal x_2 and the subtraction of the received signal y_1 , and then decodes x_1 without the interference of the UE-2. In the ideal case of lack of decoding errors, the spectral performances of each user will be:

$$R_1(b/s/Hz) = \log_2 \left(1 + \frac{p_1 |h_1|^2}{N_1} \right), \quad (5)$$

$$R_2(b/s/Hz) = \log_2 \left(1 + \frac{p_2 |h_2|^2}{p_1 |h_2|^2 + N_2} \right), \quad (6)$$

where p_i and N_i denote the transmit power and Gaussian noise power and inter-cell interference by the i -th user, respectively.

a) *Advantages of NOMA*: NOMA presents promising benefits in its application in wireless networks in new generation technologies, which show a high demand for simultaneously connected users. The benefits of using NOMA in wireless networks are high spectral efficiency, adequate power allocation, low latency, massive connectivity, good compatibility, etc.

b) *Disadvantages of NOMA*: The disadvantages of NOMA are dynamic user pairing, impact of transmission distortion, resource allocation, etc.

1) POWER DOMAIN NOMA

Power domain NOMA, served simultaneously by multiple users, channel frequency or code spreading, and multiple access is implemented by multiplexing the power domain, which means that various power levels are allocated to various users. A single frequency channel in the power domain NOMA is allocated to several users in the same cell and therefore better connectivity is possible compared to OMA.

The bandwidth available is not split between different users and each user can transmit the entire available spectrum for high system performance. Moreover, multiple users are served simultaneously, and no users are required to submit scheduling requests from the base station to ensure low transmission latency. Power domain NOMA also supports existing OMA systems, e.g., TDMA and FDMA; existing wireless networks can be easily adopted.

2) CODE DOMAIN NOMA

The signals can be superimposed together in the power domain NOMA by several users. The benefit is that the interference cancellation technology is better but still complicated [18]. So, the most preferred choice is a NOMA code domain. The NOMA code domain multiplexes users by using specific sequences with sparse, low-density, and low cross-correlation properties for each user.

a: IDMA

The interleave division multiple access (IDMA) is considered a potential applicant in the code domain NOMA. It can be regarded as a particular case of code division multiple access direct sequences. In IDMA, specific sequences are not used to distinguish users instead of the code division multiple access. Instead, the entire bandwidth is for forwarding the error correction code, resulting in a shallow code rate than the code division multiple access systems. In addition, user-specific interleavers in IDMA are also used as a unique feature for separating users [74].

b: LDS-CDMA

Recently significant attention has been paid to the low Density Signature Code Division Multiple Access (LDS-CDMA) [40]. The main idea of the LDS-CDMA is that only a few non-zero elements in the spreading signature have every data symbol spread over a limited number of chips. Therefore, only a small number of other data symbols interfere with every user to ensure that LDS-CDMA can be used as an overload. However, efficient multi-user detection must be further addressed to make LDS-CDMA a successful candidate for 6G air interfaces.

c: SCMA

The Sparse Code Multiple Access (SCMA) [50] is a well-known code domain NOMA technique considered for 6G, with a limited number of users permitting each other to intervene. However, a unique, sparse, multidimensional, and complex codebook is assigned to each user. In SCMA, the codebooks are used to simultaneously recognize multiple users to spread the modulated symbols from the users over the allocated resources. SCMA has certain features that can be listed below.

- Bits are mapped directly from the predefined multidimensional codebook to the multidimensional codeword. Users are differentiated using code words, and therefore multiple access is achieved.

- MPA Multiuser Detection Scheme in moderately complex recipients is used.

d: PDMA

The characteristic that identifies a NOMA scheme as a PDMA is that non-orthogonal patterns are present in LDs-CDMA [26] rather than spread sequences. PDMA patterns are used to map the data transferred to a group of resources, whether time, frequency, space resource, or any combination of such resources. Compared to the distribution code, the concept of PDMA patterns could be more widely understood. In the general case, a PDMA pattern matrix element can be either filled with binary numbers or weighed by the power scaling and shifting of phase.

e: MUSA

A further key feature is MUSA [76], along with the overloading, grant-free access. This strategy allows every user to choose freely from the large cardinality of their spillover sequence, which fails to coordinate the resource base. MUSA can reduce overhead signaling and transmission delays caused by conventional grant-based transmissions by adopting grant-free access. It reduces MUSA's device energy consumption, and thus the uplink transmission is suggested by MUSA. A short length and low cross-correlation of MUSA spreading sequences should be required to support many free users and minimize the impact of a user collision.

C. D-OMA

The high complexity and increased power usage on receivers are two significant impediments to implementing in-band NOMA clusters on a large scale. D-OMA is proposed to solve these problems to fulfill the requirements for 6G. D-OMA overlaps sub-bands of NOMA clusters. Let δ be the overlapping percentage. When δ is zero, it is the power-domain NOMA. Due to overlapping NOMA clusters, inter-cluster interference (ICI) may arise. Therefore, if non-overlapping massive in-band NOMA clustering is utilized, the size of each cluster should be reduced so that the total of intra-NOMA interference (INI) and ICI is equal to INI. Spectral efficiency obtained by a large in-band NOMA cluster is retained by integrating more clusters into the same allocated total spectrum (Fig. 7). The degree of complexity and power consumption specifications on various NOMA terminal systems would be greatly decreased at the same time by reducing sizes of different NOMA clusters, thus maintaining the same efficiency restrictions as before.

A high level of cluster overlap creates noise on the curves, especially at high power costs. The suggested scheme in [3] could apply to both uplink and downlink transmissions. Still, it may be challenging to use D-OMA at the uplink as the need to share control signals between the cooperating APs and terminal devices increases. Compared to a large NOMA, the D-OMA efficiency depends on the scale and the overlap between the clusters and the spectrum. With D-OMA, compared to the massive in-band NOMA, it is possible to reduce

TABLE 3. General comparisons of 1G to 6G.

Generation	MAS	Application	Frequency	Core Design	Bandwidth	Advantage	Disadvantage
1G	FDMA	AMPS	30 KHZ	PSTN	2.4 Kbps	Secrecy and safety to data and voice calls	Limited capacity
2G	TDMA	GSA	1.8 Ghz	PSTN	64 Kbps	Enabled services such as SMS and MMS (Multimedia Message)	Digital signals could be weak if there is no network coverage in any specific area
3G	CDMA	UMTS	1.6 – 2 Ghz	Packet network	2 Mbps	3G Internet allows mobile phone to use as a GPS navigation device	The frequency of 3G transmission is different, that implies that at each base station, the cellular service provider must setup the correct configuration, which can be expensive
4G	OFDMA	LTE	2 – 8 Ghz	Internet	200 Mbps	4G networks have a lot more coverage than other networks, such as Wi-Fi, which enables users to rely on hotspots in each region user visits	Multiple antennas and transmitters are used for 4G mobile networks. Therefore, consumers can experience much lower battery life on their mobile devices while on this network.
5G	NOMA – RSMA	MIMO, mm Waves	3 – 30 Ghz	Internet	1Gbps	High resolution and bi-directional large bandwidth shaping	Security and privacy issues yet to be overcome
6G	D-OMA	B5G	95 Ghz	Internet	1 Tbps	Holographic connection (Holographic connectivity) which means smooth coverage anywhere using Augmented Reality (AR)/ Virtual Reality (VR)	Many of the old devices would not be competent to 6G, hence, all of them need to be replaced with new one — expensive deal

cluster size (and the complexity of SIC) while delivering nearly equivalent efficiency.

Designing SIC processes for NOMA receivers presents a new challenge. The devices are ordered in the traditional NOMA from the same AP point of view, and the SIC is obtained accordingly. D-OMA cannot use the same SIC technology because many cooperation APs will order different devices differently. In addition, some suboptimal, low-complexity methods are sufficient to lower the complexity of a D-OMA destination, which assigns the same order to each unit for all serving APs. Relating to all operating APs/BSs, the best order for D-OMA cluster members may be obtained.

Next-generation wireless networks, such as 5G and 6G, would incorporate various frequencies, requiring variable structures for transmission power and network architectures. The D-OMA parameters must therefore be built in the used frequency range, including the overlapping percentage δ . If δ is not correctly selected, this can have a very high ICI effect. Alternatively, lower frequency bands will suffer less spread loss. The transmission power requirements would also be lower. Consequently, the output of D-OMA in lower frequency bands is possibly better than in higher frequency bands, at the highest δ values.

III. COMPARISON AND RESULTS

The simulation is conducted in MATLAB. The system consists of a transmission and reception system for NOMA and OFDMA through a wireless channel with the additive white

Gaussian noise (AWGN). For NOMA, independent random data was generated for the upper layer (UL) and lower layer (LL). The original data is coded, considering the coding rates of the respective layers in each simulation. In the UL layer case, coding rates of 4/5 and 9/10 were used with a QPSK modulation, while in the LL layer, coding rates of 1/3 and 2/5 were used with 16-QAM modulation. An injection factor (g) was applied to the LL layer, which determines the power level of the LL with respect to UL, can vary between decimal values from 0 to 1. Next, the OFDMA symbol is formed to be transmitted on the AWGN channel and subsequently receive the signal as an OFDM symbol using the same coding and modulation parameters of the transmission stage. It must be taken into account that for the recovery of the information of each layer there is different complexity in the receiver, that is, to obtain the resulting information from each layer different processes are carried out. In the UL layer, the OFDMA receiver signal is used, and it is demodulated and decoded to obtain the layer information. The lower layer has noise in the process. In the LL, it is necessary that the OFDMA receiver signal is stored in a Buffer, using the information of the encoded and modulated UL to cancel the stored signal and obtain the corresponding information from the LL. For OFDMA a similar process is applied and analyzed using two simulations. The first case is implemented with parameters of the UL and the second case with parameters of the LL, to make the respective comparisons with the NOMA communication system and its respective layers, performing 1000 iterations to obtain the presented figures. Table 3

provides general comparisons of 1G to 6G networks in different terms.

The analysis of the figures was performed based on the behavior observed in each of the parameter combinations, BS identifies the i -th user's signal, it decodes the j -th ($j < i$) user's signal first and after that eliminates $(i - 1)$ users' signals from y observation. Interference is the remaining $(K - i)$ signals.

A. NOMA VS OFDMA

Fig. 8 shows a comparison of NOMA and OFDMA structures. The technology of access to the medium that is currently in use for 5G is the multiple access variant of OFDM called OFDMA. For this reason, the figures generate a contrast between NOMA and OFDMA in order to observe the differentiation of non-orthogonal systems with orthogonal systems. We assume that $|h_1|^2/N_1 \geq |h_2|^2/N_2 \geq \dots \geq |h_K|^2/N_K$, and a descending-order-based power allocation $p_1 \leq p_2 \leq \dots \leq p_K$ can be taken into consideration. Assuming that the interfering signals are decoded fully error-free, the attainable user rate $R_i (i = 1, 2, \dots, K)$ can be given as [79]

$$R_i = W \log_2 \left(1 + \frac{p_i |h_i|^2}{\left(\sum_{j=1}^{i-1} p_j \right) |h_i|^2 + N_i W} \right), \quad (7)$$

where W is the bandwidth.

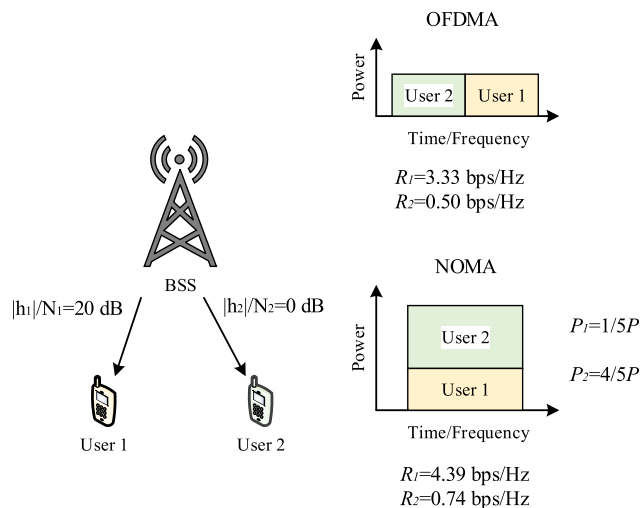


FIGURE 8. OFDMA vs NOMA.

It should be noted that in the figure 8, since they are multiple access, resource is made to the use of the spectrum that users have. A better use of the NOMA spectrum can be observed. Since the two users with these multiple access schemes are assigned a better relationship bps / Hz, as long as it is in symmetrical environments. The parameters for the transmission of both users present similar characteristics. In this case, the curve shown by NOMA is more accurate

in terms of resource allocation. Still, the great problem presented by NOMA is the implementation in non-symmetrical environments. NOMA vs. OFDMA comparisons is shown for bit rate per user and spectrum efficiency in Figs. 9 and 10, respectively. Table 4 contains simulation parameter values for Figs. 9 and 10.

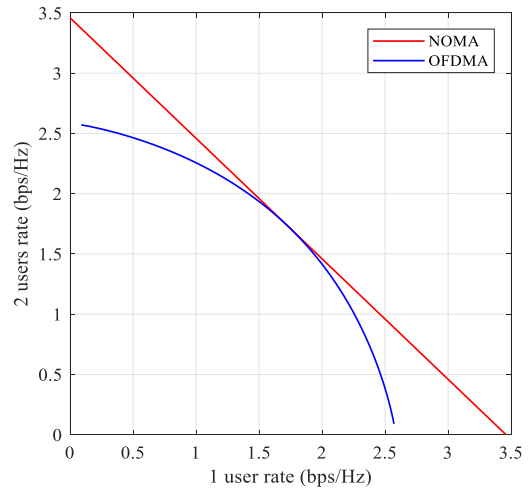


FIGURE 9. Bit rate per user (NOMA and OFDMA).

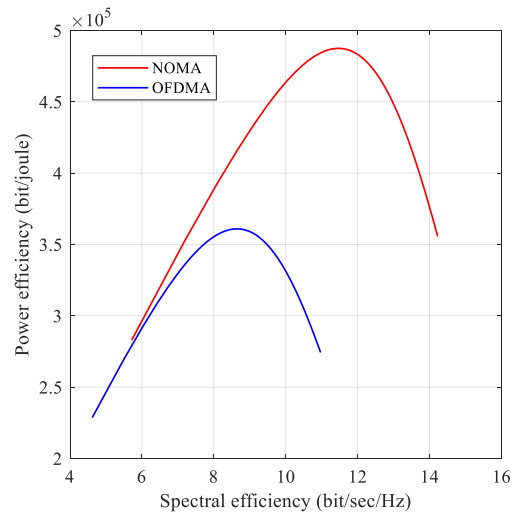


FIGURE 10. Spectrum efficiency comparison of NOMA and OFDMA.

A comparison between spectral efficiency and energy efficiency is depicted. We can see how NOMA presents an apparent better behavior in spectral efficiency because it gives us more bits per Hz in terms of energy efficiency. Energy consumption increases for definite users. Due to the higher processing load, the information would undergo demodulation to be presented to the user. On the contrary, OFDMA is more efficient in terms of energy consumption. It does not exceed 4 bits/joule for the same scenario that NOMA occupies. Therefore, OFDMA makes better utilization of

TABLE 4. Simulation parameters for figures 7 and 8.

Gain for User 1	10
Gain for User 2	10
Max number of users	56
Max spectral efficiency measured in Bits/Hz	600
Count	2
Achievable rate of each user vs. normalized offset using NOMA with two users	K = 2

spectrum and energy resources to the transmission of information. Table 5 illustrates the advantages and disadvantages of OFDMA and NOMA.

TABLE 5. Comparing pros and cons of both OFDMA and NOMA.

Method	Pros	Cons
OFDMA	No intracellular interference higher spectral efficiency and MIMO compatibility.	Needs synchronous multiplexing lost links for large number of users.
NOMA	It allows asynchronous multiplexing.	Not suitable for higher spectral efficiency. Requires further processing for receiver.

Supporting K users in the uplink of an AWGN channel (K can be greater than 2) [79]

$$\sum_{i=1}^K R_k \leq W \log \left(1 + \frac{\sum_{i=1}^K P_i}{N_0 W} \right), \quad (8)$$

where N_0 represents the power spectral density of Gaussian noise. Comparison of channel capacity for OMA and NOMA is given in Fig. 11. More particularly, capacity of multiple access channel can be given as [80]

$$R_k = W \log_2 \left(1 + \frac{p_k |h_k|^2}{\left(\sum_{j=k+1}^K P_j \right) |h_k|^2 + N_0 W} \right). \quad (9)$$

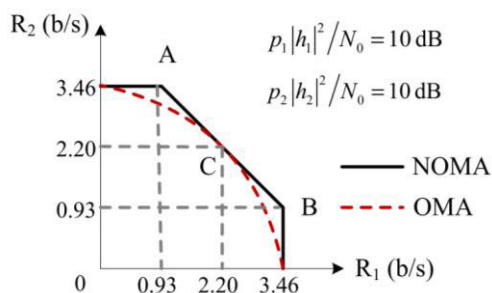


FIGURE 11. Comparison of channel capacity between OMA and NOMA.

B. D-OMA VS NOMA

In D-OMA, we permit diverse NOMA groups with neighboring recurrence groups to cover by a measure of $\delta\%$ of

their most extreme assigned sub-band (i.e., $\delta = 0$ compares to conventional power-domain NOMA). The size of each NOMA cluster can be reduced to adjust for the ICI introduced by overlapping NOMA clusters. The cumulative amount of the INI and ICI stays precisely equal to the magnitude of the INI when using non-overlapping large in-band NOMA clusters. Consequently, by incorporating more clusters within the same allotted total range, the spectral efficiency obtained by a sizeable in-band NOMA cluster is retained. At the same time, by diminishing sizes of various NOMA bunches, the degree of multifaceted nature prerequisites and force utilization of gadget SIC be essentially reduced.

In contrast, a similar presentation prerequisite is kept up as in the past. The level of covering among NOMA groups is viewed as a plan boundary in the worldwide streamlining issue that accomplishes ideal bunching for NOMA gadgets and their capacity distribution. Fig. 12 demonstrates a spectrum vs. power efficiency comparison of NOMA and D-OMA. Parameters are used in the D-OMA simulation of performance are presented in Table 6.

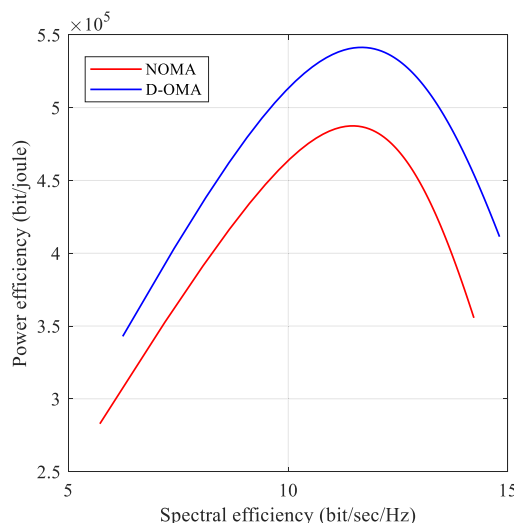


FIGURE 12. Spectrum vs Power efficiency comparison of NOMA and D-OMA.

The downlink transmission rate at the gadget inside a certain NOMA group can be given as [3]:

$$R_i = W \log_2 \left(1 + \frac{\sum_{j=1}^K p_{i,j} |h_{i,j}|^2}{\sum_{j=1}^K \Lambda_j |h_{i,j}|^2 + \eta I_{ICI} + N_i} \right). \quad (10)$$

where $\Lambda_j = \sum_{k=1}^M p_{j,k} \cdot |h_{i,j}|^2$ is the complex gain in the channel between the user of i -th NOMA and the AP serving K -th. A smaller cluster size (M) would result in a lesser Λ_j and, thus, a higher signal-to-interference-plus-noise ratio (SINR) at i -th device for the same K . η denotes the percentage of

TABLE 6. Parameters are used in the D-OMA simulation of performance.

Cell Layout	Hexagonal 19 cells
Distance between APs	0.3 km (simulated)
Transmission bandwidth	4.3 MHz
Number of users M per cell	64
I_m	zero due to the comprehensive cooperation among APs and orthogonality among NOMA clusters
The value of β	relies on unified link quality metric used with regard to all serving APs in ordering the devices of a definite cluster.
The global ordering rank of the $m^{\text{th}} N_m$ and β	Derived from $\gamma_{m,k} = h_{m,k} $

NOMA clusters overlapping. We consider I_{CI} is same as the 10% of maximum power budget per AP.

C. NOMA VS SCMA

In addition to the new waveform proposals, possible new alternatives for multiple access methods are also being considered, such as SCMA, briefly described below.

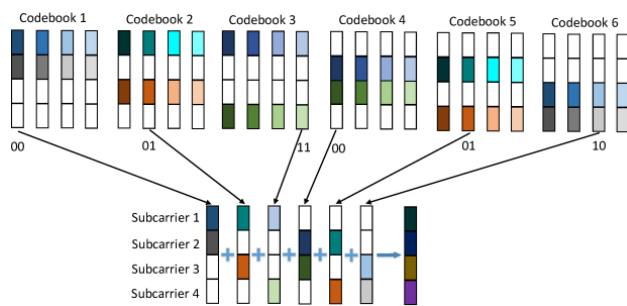


FIGURE 13. SCMA Codebook.

In this technology of multiple access with sparse codes, with the bits coming from the channel encoder of the transmitter, a joint expansion-modulation processing is carried out that transforms blocks of those bits into code words extracted from a repertoire codebook, whose elements are symbols of a multidimensional constellation. In Fig. 13, the block diagram is represented. As the SCMA signal looks at the output of the processor, a conventional OFDM modulator is carried.

Although similar in concept to that carried out in CDMA, the expansion differs from it in the constitution of the codes used. In CDMA, codes are ‘‘compact’’ or dense with all of their non-zero elements. (Values ± 1). In SCMA, however, codewords contain a large number of zeros. Furthermore, these sparse codes are contained, as has been said, in a repertoire of conveniently designed codes, each of which defines a layer (layer) and contains $K = 2m$ symbols, m is the number of bits of the incoming block to the module expander. Of these K symbols, N are non-zero and are taken from a multidimensional constellation. The choice of this type of constellation is because it offers greater possibilities of the minimum distance between the points of the constellation, which implies a reduction in the probability of error.

Therefore, the iterative equation can be written as [79].

$$m_{n \rightarrow k}^{(t)}(x_k) \propto \sum_{\{x_i | i \in N(n) \setminus k\}} \frac{1}{\sqrt{2\pi\sigma}} \times e^{-\frac{1}{2\sigma^2} \left(y_n - h_{n,k}x_k - \sum_{\{i \in N(n) \setminus k\}} h_{n,i}x_i \right)^2} \times \prod_{\{i \in N(n) \setminus k\}} m_{i \rightarrow k}^{(t-1)}(x_i) \tag{11}$$

If w is the maximum users number superimposed at the identical chip, then the receiver complexity follows the order of $O(|x_w|)$ rather than $O(|x_K|)$ ($K > w$). Table 7 contains specification for SCMA prototype.

Non-null elements occupy a unique and exclusive position on each layer called a sparsity pattern. The number J of layers is same as the number of combinations of K elements. The overload factor (overlaid factor) is the ratio J/K expressed as a percentage. As an example, Fig. 13 illustrates the principal diagram of an SCMA encoder with $J = 6$ layers (6 repertoires), for input bit blocks of size $m = 3$. The size of each word, that is, the length of the expansion is $K = 4$ and number of non-zero elements is $N = 2$, so 6 layers can be formed. Each 3-bit input block is mapped to a code word. The example in the figure shows, in different colors, the code words assigned by the layers to the blocks: 011 of user 1 (layer 1), 000 of user 2, and so on until block 111 of user 6.

TABLE 7. Specification for SCMA prototype.

Mode	Values
Number of active UEs	12 out of 14
Transmit power of UE	23 dBm (max) with open-loop power control
Basic waveform	OFDM/F-OFDM
MIMO mode	1 by 2 SIMO
Center frequency/bandwidth	2.6 GHz/20 MHz
Scheduled resource	48 RBs/4 RBs
Code rate	0.3-0.92
SCMA codebook	24 by 8, 4 points
Frame structure	TDD configuration 1, 4 subframes for PUSCH

Fig. 14 shows the probability of error in NOMA and SCMA with Huawei specification. A collective figure of the SCMA, FDMA, NOMA, D-OMA spectral efficiency and capacity per number of users are presented in Figs. 15 and 16, respectively.

The bar obstruction can be smothered by spatial sifting, which is like the sign recognition calculation of inadequate code for SCMA. A couple of impedance dropping approaches are utilized for eliminating the between pillar impedance and the intra-pillar impedance. Expecting that the spatial separating vector of the i -th client in the b -th pillar is $f_{b,i}$ the sign $z_{b,i}$

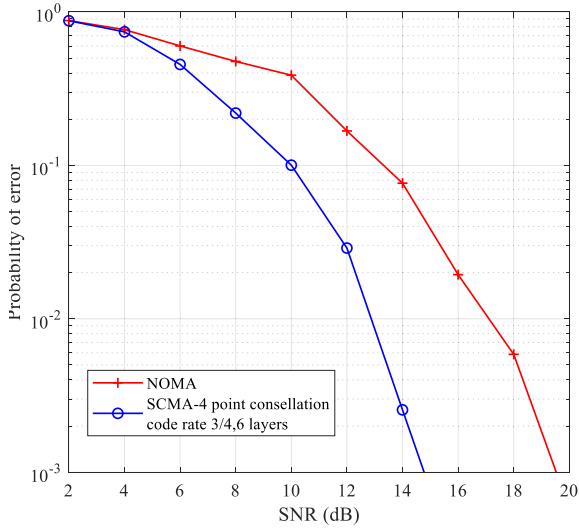


FIGURE 14. Probability of error in NOMA and SCMA with Huawei Specification.

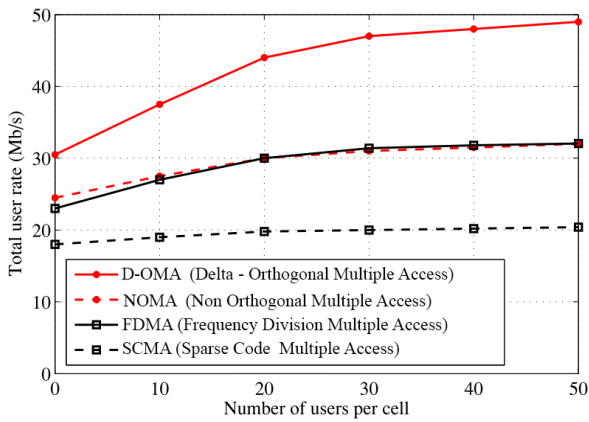


FIGURE 15. The comparison of spectral efficiency of the SCMA, FDMA, NOMA, and D-OMA.

after spatial separating can be written as [79].

$$z_{b,i} = f_{b,i}^H y_{b,i} = f_{b,i}^H H_{b,i} m_b \sum_{j=1}^{k_b} \sqrt{p_{b,j}} x_{b,j} + f_{b,i}^H H_{b,i} \sum_{\substack{b'=1 \\ b' \neq b}}^B \sqrt{p_{b',j}} x_{b',j} + f_{b,i}^H v_{b,i} \quad (12)$$

where $H_{b,i}$ represents the channel matrix of size.

In the uplink systems, the capacity of these methods related to K users, where BS is hardwired with several antennas and there is a single transmitter antenna for each user, the signal obtained at BS can be given as:

$$y = \sum_{i=1}^K h_i \sqrt{p_i} x_i + v. \quad (13)$$

where x_i are the transmit power. v linked with the power density N_0 denotes Gaussian noise and inter-cell interference at BS.

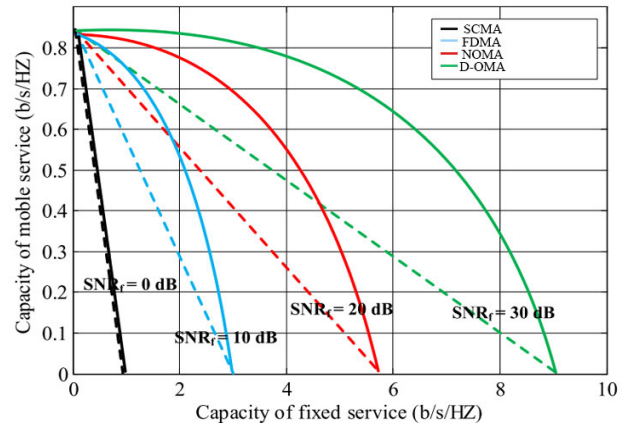


FIGURE 16. A collective figure showing the capacity of SCMA, FDMA, NOMA, D-OMA.

TABLE 8. Power domain based expansion vs the code domain based expansion.

Schemes	Power Domain Based	Code Domain Based					Interlayer Based
	SPC-NOMA	MUSA	SCMA	PDMA	RSMA	NCMA	IGMA
Scenario	DL-eMBB	UL: mMTC, URLLC DL: eMBB	UL: mMTC, URLLC DL: eMBB	UL: mMTC, URLLC DL: eMBB	UL: mMTC, URLLC	UL: eMBB, mMTC, URLLC	UL: eMBB, mMTC, URLLC
Multiplexing Domain	Power	Code/Power	Code/Power	Code/Power/Spectral	Code/Power	Code	Interleaver
Transmitting Overhead	Low/Medium	High	Medium/High	Medium/High	Low	High	High

The size of each word, that is, the length of the expansion. Although a similar concept is carried out in CDMA, it differs from it in the constitution of the codes used in SCMA. However, code words contain many zeros. Therefore, we speak of low-density and sparse spreading codes. Furthermore, of these K symbols, N is non-zero and are taken from a multidimensional constellation. Table 8 compared the power domain-based expansion vs. the code domain-based expansion:

As a final summary, Table 9 summarizes the performance of the different methods with respect to the most relevant characteristics.

TABLE 9. Performance of the different methods with respect to the most relevant characteristics.

PARAMETER	SCMA	RSMA	NOMA
Spectral Efficiency	Medium	High	High
Processing Complexity	Medium	Medium	High
ISI / Multipath Distortion	Low	Medium	Low
Latency	Short	Medium	Short
Compatible with OFDM	Yes	Yes	No

IV. CONCLUSION

With the rapid growth of cellular technology, various investigations are being carried out to continue ensuring the

sustainability of mobile communication services. Users are increasingly demanding a higher quality of service, higher speeds, and better connectivity among others. This paper's general objective is to evaluate the simulation-level performance of multi access techniques such as OMA, NOMA, and the newly developed D-OMA for 6G. For this, it is necessary to study the traditional techniques of access mechanism that have existed in the history of mobile communications that is OMA. The operation and the advantages and disadvantages of each OMA technique (FDMA, TDMA, CDMA, and OFDMA) are defined in each of these techniques. Moreover, NOMA and D-OMA are studied in detail. The benefits and difficulties that this scheme can generate in next-generation cellular telephony are mentioned. An evaluation and comparison of the transmission rate at the cell level between NOMA and OMA and the new D-OMA method are presented. The NOMA technique is superior to OMA as long as the power allocation is correct, yet not as much as D-OMA, achieving higher spectral efficiency when enough clusters are supplied.

Many researchers have been working on NOMA techniques and their implementation and the solution of different technical problems. The literature shows that NOMA is companionable with cooperative communications, relay, and MIMO and improves performance ominously. Researchers introduced techniques that easily enhance the low data rate and low quality of cellular networks through NOMA coordination. In addition to the literature's study questions, there are many other problems and open issues which must be addressed. One of the challenges is the allocation of resources. In comparison, NOMA has been taken to scientists' attention by developing resource allocation algorithms to NOMA as a possible radio access technology in next-generation communication systems due to different practical challenges. These include scalability, the existence of multi-cell interference, integration of carrier aggregation, allocation of resources under minimal channel input, QoS-assured allocation of resources, and intercell communications.

REFERENCES

- [1] L. Dai, B. Wang, Y. Yuan, S. Han, I. Chih-Lin, and Z. Wang, "Non-orthogonal multiple access for 5G: Solutions, challenges, opportunities, and future research trends," *IEEE Commun. Mag.*, vol. 53, no. 9, pp. 74–81, Sep. 2015.
- [2] T. Yunzheng, L. Long, L. Shang, and Z. Zhi, "A survey: Several technologies of non-orthogonal transmission for 5G," *China Commun.*, vol. 12, no. 10, pp. 1–15, Oct. 2015.
- [3] Y. Al-Eryani and E. Hossain, "The D-OMA method for massive multiple access in 6G: Performance, security, and challenges," *IEEE Veh. Technol. Mag.*, vol. 14, no. 3, pp. 92–99, Sep. 2019.
- [4] S. M. R. Islam, N. Avazov, O. A. Dobre, and K.-S. Kwak, "Power-domain non-orthogonal multiple access (NOMA) in 5G systems: Potentials and challenges," *IEEE Commun. Surveys Tuts.*, vol. 19, no. 2, pp. 721–742, 2nd Quart., 2017.
- [5] M. Mohammadkarimi, M. A. Raza, and O. A. Dobre, "Signature-based nonorthogonal massive multiple access for future wireless networks: Uplink massive connectivity for machine-type communications," *IEEE Veh. Technol. Mag.*, vol. 13, no. 4, pp. 40–50, Dec. 2018.
- [6] S. M. R. Islam, M. Zeng, O. A. Dobre, and K.-S. Kwak, "Resource allocation for downlink NOMA systems: Key techniques and open issues," *IEEE Wireless Commun.*, vol. 25, no. 2, pp. 40–47, Apr. 2018.
- [7] P. Wang, J. Xiao, and L. Ping, "Comparison of orthogonal and non-orthogonal approaches to future wireless cellular systems," *IEEE Veh. Technol. Mag.*, vol. 1, no. 3, pp. 4–11, Sep. 2006.
- [8] R. Ruby, S. Zhong, H. Yang, and K. Wu, "Enhanced uplink resource allocation in non-orthogonal multiple access systems," *IEEE Trans. Wireless Commun.*, vol. 17, no. 3, pp. 1432–1444, Mar. 2018.
- [9] I. M. Braga, Jr., F. R. M. Lima, T. F. Maciel, and F. R. P. Cavalcanti, "Maximizing energy efficiency in SC-FDMA uplink with QoS guarantees and user satisfaction," *Trans. Emerg. Telecommun. Technol.*, vol. 30, no. 12, pp. 1–24, Dec. 2019.
- [10] S. K. Sharma, M. Patwary, and S. Chatzinotas, "Multiple access techniques for next generation wireless: Recent advances and future perspectives," *EAI Endorsed Trans. Wireless Spectr.*, vol. 2, no. 7, pp. 1–12, 2016.
- [11] R. Steele and L. Hanzo, *Mobile Radio Communications: Second and Third Generation Cellular and WATM Systems*, 2nd ed. Hoboken, NJ, USA: Wiley, 1999.
- [12] K. S. Gilhousen, I. M. Jacobs, R. Padovani, A. J. Viterbi, L. A. Weaver, Jr., and C. E. Wheatley, III, "On the capacity of a cellular CDMA system," *IEEE Trans. Veh. Technol.*, vol. 40, no. 2, pp. 303–312, May 1991.
- [13] J. Li, X. Wu, and R. Laroia, *OFDMA Mobile Broadband Communications: A Systems Approach*. Cambridge, U.K.: Cambridge Univ. Press, 2013.
- [14] A. Benjebbour, Y. Saito, Y. Kishiyama, A. Li, A. Harada, and T. Nakamura, "Concept and practical considerations of non-orthogonal multiple access (NOMA) for future radio access," in *Proc. Int. Symp. Intell. Signal Process. Commun. Syst. (IEEE ISPACS)*, Naha, Japan, Nov. 2013, pp. 770–774.
- [15] Y. Saito, Y. Kishiyama, A. Benjebbour, T. Nakamura, A. Li, and K. Higuchi, "Non-orthogonal multiple access (NOMA) for cellular future radio access," in *Proc. IEEE 77th Veh. Technol. Conf. (VTC Spring)*, Jun. 2013, pp. 1–5.
- [16] K. Higuchi and Y. Kishiyama, "Non-orthogonal access with random beamforming and intra-beam SIC for cellular MIMO downlink," in *Proc. IEEE Veh. Technol. Conf. (IEEE VTC Fall)*, Las Vegas, NV, USA, Sep. 2013, pp. 1–5.
- [17] N. Nonaka, Y. Kishiyama, and K. Higuchi, "Non-orthogonal multiple access using intra-beam superposition coding and SIC in base station cooperative MIMO cellular downlink," in *Proc. IEEE Veh. Technol. Conf. (IEEE VTC Fall)*, Vancouver, BC, Canada, Sep. 2014, pp. 1–5.
- [18] M. Zeng, A. Yadav, O. A. Dobre, G. I. Tsiropoulos, and H. V. Poor, "Capacity comparison between MIMO-NOMA and MIMO-OMA with multiple users in a cluster," *IEEE J. Sel. Areas Commun.*, vol. 35, no. 10, pp. 2413–2424, Oct. 2017.
- [19] M. Zeng, A. Yadav, O. A. Dobre, G. I. Tsiropoulos, and H. V. Poor, "On the sum rate of MIMO-NOMA and MIMO-OMA systems," *IEEE Wireless Commun. Lett.*, vol. 6, no. 4, pp. 534–537, Aug. 2017.
- [20] A. Benjebbour, K. Saito, A. Li, Y. Kishiyama, and T. Nakamura, "Non-orthogonal multiple access (NOMA): Concept, performance evaluation and experimental trials," in *Proc. Int. Conf. Wireless Netw. Mobile Commun. (WINCOM)*, Marrakesh, Morocco, Oct. 2015, pp. 1–6.
- [21] A. Benjebbour, A. Li, K. Saito, Y. Saito, Y. Kishiyama, and T. Nakamura, "NOMA: From concept to standardization," in *Proc. IEEE Conf. Stand. Commun. Netw. (IEEE CSCN)*, Tokyo, Japan, Oct. 2015, pp. 18–23.
- [22] B. Kim, W. Chung, S. Lim, S. Suh, J. Kwun, S. Choi, and D. Hong, "Uplink NOMA with multi-antenna," in *Proc. IEEE 81st Veh. Technol. Conf. (VTC Spring)*, Glasgow, U.K., May 2015, pp. 1–5.
- [23] Z. Ding, F. Adachi, and H. V. Poor, "The application of MIMO to non-orthogonal multiple access," *IEEE Trans. Wireless Commun.*, vol. 15, no. 1, pp. 537–552, Jan. 2016.
- [24] Z. Ding, L. Dai, and H. V. Poor, "MIMO-NOMA design for small packet transmission in the Internet of Things," *IEEE Access*, vol. 4, pp. 1393–1405, 2016.
- [25] Y. Lan, A. Benjebbour, X. Chen, A. Li, and H. Jiang, "Considerations on downlink non-orthogonal multiple access (NOMA) combined with closed-loop SU-MIMO," in *Proc. 8th Int. Conf. Signal Process. Commun. Syst. (ICSPCS)*, Dec. 2014, pp. 1–5.
- [26] C. Yan, A. Harada, A. Benjebbour, Y. Lan, A. Li, and H. Jiang, "Receiver design for downlink non-orthogonal multiple access (NOMA)," in *Proc. IEEE 81st Veh. Technol. Conf. (VTC Spring)*, Glasgow, U.K., May 2015, pp. 1–6.
- [27] K. Saito, A. Benjebbour, Y. Kishiyama, Y. Okumura, and T. Nakamura, "Performance and design of SIC receiver for downlink NOMA with open-loop SU-MIMO," in *Proc. IEEE Int. Conf. Commun. Workshop (ICCW)*, London, U.K., Jun. 2015, pp. 1161–1165.

- [28] X. Chen, A. Bejjebbour, A. Li, H. Jiang, and H. Kayama, "Consideration on successive interference canceller (SIC) receiver at cell-edge users for non-orthogonal multiple access (NOMA) with SU-MIMO," in *Proc. IEEE 26th Annu. Int. Symp. Pers., Indoor, Mobile Radio Commun. (PIMRC)*, Aug. 2015, pp. 522–526.
- [29] Z. Ding, M. Peng, and H. V. Poor, "Cooperative non-orthogonal multiple access in 5G systems," *IEEE Commun. Lett.*, vol. 19, no. 8, pp. 1462–1465, Aug. 2015.
- [30] Z. Ding, H. Dai, and H. V. Poor, "Relay selection for cooperative NOMA," *IEEE Wireless Commun. Lett.*, vol. 5, no. 4, pp. 416–419, Aug. 2016.
- [31] D. Wan, M. Wen, F. Ji, H. Yu, and F. Chen, "Non-orthogonal multiple access for cooperative communications: Challenges, opportunities, and trends," *IEEE Wireless Commun.*, vol. 25, no. 2, pp. 109–117, Apr. 2018.
- [32] S. Han, C. Chih-Lin, Z. Xu, and Q. Sun, "Energy efficiency and spectrum efficiency co-design: From NOMA to network NOMA," *IEEE COMSOC MMTC E-Lett.*, vol. 9, no. 5, pp. 21–24, Sep. 2014.
- [33] H. Tabassum, E. Hossain, and J. Hossain, "Modeling and analysis of uplink non-orthogonal multiple access in large-scale cellular networks using Poisson cluster processes," *IEEE Trans. Commun.*, vol. 65, no. 8, pp. 3555–3570, Aug. 2017.
- [34] W. Shin, M. Vaezi, B. Lee, D. J. Love, J. Lee, and H. V. Poor, "Non-orthogonal multiple access in multi-cell networks: Theory, performance, and practical challenges," *IEEE Commun. Mag.*, vol. 55, no. 10, pp. 176–183, Oct. 2017.
- [35] J. Choi, "Non-orthogonal multiple access in downlink coordinated two-point systems," *IEEE Commun. Lett.*, vol. 18, no. 2, pp. 313–316, Feb. 2014.
- [36] Z. Ding, Z. Yang, P. Fan, and H. V. Poor, "On the performance of non-orthogonal multiple access in 5G systems with randomly deployed users," *IEEE Signal Process. Lett.*, vol. 21, no. 12, pp. 1501–1505, Dec. 2014.
- [37] Y. Endo, Y. Kishiyama, and K. Higuchi, "Uplink non-orthogonal access with MMSE-SIC in the presence of inter-cell interference," in *Proc. Int. Symp. Wireless Commun. Syst. (ISWCS)*, Paris, France, Aug. 2012, pp. 261–265.
- [38] P. Sedtheetorn and T. Chulajata, "Spectral efficiency evaluation for non-orthogonal multiple access in Rayleigh fading," in *Proc. 18th Int. Conf. Adv. Commun. Technol. (ICACT)*, Jan. 2016, pp. 747–750.
- [39] Z. Ding, F. Adachi, and H. V. Poor, "Performance of MIMO-NOMA downlink transmissions," in *Proc. IEEE Global Commun. Conf. (GLOBECOM)*, San Diego, CA, USA, Dec. 2014, pp. 1–6.
- [40] R. Hoshyar, F. P. Wathan, and R. Tafazolli, "Novel low-density signature for synchronous CDMA systems over AWGN channel," *IEEE Trans. Signal Process.*, vol. 56, no. 4, pp. 1616–1626, Apr. 2008.
- [41] D. Guo and C.-C. Wang, "Multiuser detection of sparsely spread CDMA," *IEEE J. Sel. Areas Commun.*, vol. 26, no. 3, pp. 421–431, Apr. 2008.
- [42] J. van de Beek and B. M. Popovic, "Multiple access with low-density signatures," in *Proc. IEEE Global Telecommun. Conf. (GLOBECOM)*, Honolulu, HI, USA, Nov./Dec. 2009, pp. 1–6.
- [43] R. Razavi, R. Hoshyar, M. A. Imran, and Y. Wang, "Information theoretic analysis of LDS scheme," *IEEE Commun. Lett.*, vol. 15, no. 8, pp. 798–800, Aug. 2011.
- [44] R. Hoshyar, R. Razavi, and M. Al-Imari, "LDS-OFDM an efficient multiple access technique," in *Proc. IEEE 71st Veh. Technol. Conf. (VTC-Spring)*, Taipei, Taiwan, May 2010, pp. 1–5.
- [45] M. Al-Imari, P. Xiao, M. A. Imran, and R. Tafazolli, "Uplink non-orthogonal multiple access for 5G wireless networks," in *Proc. 11th Int. Symp. Wireless Commun. Syst. (ISWCS)*, Barcelona, Spain, Aug. 2014, pp. 781–785.
- [46] M. Al-Imari, M. A. Imran, R. Tafazolli, and D. Chen, "Performance evaluation of low density spreading multiple access," in *Proc. IEEE Wireless Commun. Mobile Comput. Conf. (IEEE IWCMC)*, Limassol, Cyprus, Aug. 2012, pp. 383–388.
- [47] M. Al-Imari, M. A. Imran, and R. Tafazolli, "Low density spreading for next generation multicarrier cellular systems," in *Proc. IEEE Future Commun. Netw. (IEEE ICFCN)*, Baghdad, Iraq, Apr. 2012, pp. 52–57.
- [48] M. Al-Imari, M. A. Imran, R. Tafazolli, and D. Chen, "Subcarrier and power allocation for LDS-OFDM system," in *Proc. IEEE Veh. Technol. Conf. (IEEE VTC Spring)*, Yokohama, Japan, May 2011, pp. 1–5.
- [49] M. Al-Imari and R. Hoshyar, "Reducing the peak to average power ratio of LDS-OFDM signals," in *Proc. IEEE Wireless Commun. Syst. (IEEE ISWCS)*, York, U.K., Sep. 2010, pp. 922–926.
- [50] H. Nikopour and H. Baligh, "Sparse code multiple access," in *Proc. IEEE 24th Int. Symp. Pers. Indoor Mobile Radio Commun. (IEEE PIMRC)*, London, U.K., Sep. 2013, pp. 332–336.
- [51] Y. Zhou, H. Luo, R. Li, and J. Wang, "A dynamic states reduction message passing algorithm for sparse code multiple access," in *Proc. IEEE Wireless Telecommun. Symp. (WTS)*, London, U.K., Apr. 2016, pp. 1–5.
- [52] Y. Du, B. Dong, Z. Chen, J. Fang, and X. Wang, "A fast convergence multiuser detection scheme for uplink SCMA systems," *IEEE Wireless Commun. Lett.*, vol. 5, no. 4, pp. 388–391, Aug. 2016.
- [53] H. Mu, Z. Ma, M. Alhaji, P. Fan, and D. Chen, "A fixed low complexity message pass algorithm detector for up-link SCMA system," *IEEE Wireless Commun. Lett.*, vol. 4, no. 6, pp. 585–588, Dec. 2015.
- [54] Z. Jia, Z. Hui, and L. Xing, "A low-complexity tree search based quasi-ML receiver for SCMA system," in *Proc. IEEE Int. Conf. Comput. Commun. (ICCC)*, Chengdu, China, Oct. 2015, pp. 319–323.
- [55] Y. Liu, J. Zhong, P. Xiao, and M. Zhao, "A novel evidence theory based row message passing algorithm for LDS systems," in *Proc. Int. Conf. Wireless Commun. Signal Process. (WCSP)*, Nanjing, China, Oct. 2015, pp. 1–5.
- [56] D. Wei, Y. Han, S. Zhang, and L. Liu, "Weighted message passing algorithm for SCMA," in *Proc. IEEE Int. Conf. Wireless Commun. Signal Process. (IEEE WCSP)*, Nanjing, China, Oct. 2015, pp. 1–5.
- [57] K. Xiao, B. Xiao, S. Zhang, Z. Chen, and B. Xia, "Simplified multiuser detection for SCMA with sum-product algorithm," in *Proc. IEEE Int. Conf. Wireless Commun. Signal Process. (IEEE WCSP)*, Nanjing, China, Oct. 2015, pp. 1–5.
- [58] Y. Du, B. H. Dong, Z. Chen, J. Fang, and L. Yang, "Shuffled multiuser detection schemes for uplink sparse code multiple access systems," *IEEE Commun. Lett.*, vol. 20, no. 6, pp. 1231–1234, Jun. 2016.
- [59] A. Bayesteh, H. Nikopour, M. Taherzadeh, H. Baligh, and J. Ma, "Low complexity techniques for SCMA detection," in *Proc. IEEE Global Commun. Conf. Workshops (IEEE Globecom Workshops)*, San Diego, CA, USA, Dec. 2015, pp. 1–6.
- [60] S. Zhang, X. Xu, L. Lu, Y. Wu, G. He, and Y. Chen, "Sparse code multiple access: An energy efficient uplink approach for 5G wireless systems," in *Proc. IEEE Global Commun. Conf. (GLOBECOM)*, Austin, TX, USA, Dec. 2014, pp. 4782–4787.
- [61] Y. Wu, S. Zhang, and Y. Chen, "Iterative multiuser receiver in sparse code multiple access systems," in *Proc. IEEE Int. Commun. Conf. (ICC)*, London, U.K., Jun. 2015, pp. 2918–2923.
- [62] B. Xiao, K. Xiao, S. Zhang, Z. Chen, B. Xia, and H. Liu, "Iterative detection and decoding for SCMA systems with LDPC codes," in *Proc. IEEE Int. Conf. Wireless Commun. Signal Process. (IEEE WCSP)*, Nanjing, China, Oct. 2015, pp. 1–5.
- [63] M. Taherzadeh, H. Nikopour, A. Bayesteh, and H. Baligh, "SCMA codebook design," in *Proc. IEEE Veh. Technol. Conf. (IEEE VTC Fall)*, Vancouver, BC, Canada, Sep. 2014, pp. 1–5.
- [64] L. Yu, X. Lei, P. Fan, and D. Chen, "An optimized design of SCMA codebook based on star-QAM signaling constellations," in *Proc. IEEE Int. Conf. Wireless Commun. Signal Process. (WCSP)*, Nanjing, China, Oct. 2015, pp. 1–5.
- [65] S. Zhang, B. Xiao, K. Xiao, Z. Chen, and B. Xia, "Design and analysis of irregular sparse code multiple access," in *Proc. IEEE Int. Conf. Wireless Commun. Signal Process. (IEEE WCSP)*, Oct. 2015, pp. 1–5.
- [66] K. Au, L. Zhang, H. Nikopour, E. Yi, A. Bayesteh, U. Vilaipornsawai, J. Ma, and P. Zhu, "Uplink contention based SCMA for 5G radio access," in *Proc. IEEE Global Commun. Conf. Workshop (Globecom Workshop)*, Austin, TX, USA, Dec. 2014, pp. 900–905.
- [67] A. Bayesteh, E. Yi, H. Nikopour, and H. Baligh, "Blind detection of SCMA for uplink grant-free multiple-access," in *Proc. IEEE Wireless Commun. Syst. (IEEE ISWCS)*, Barcelona, Spain, Aug. 2014, pp. 853–857.
- [68] H. Nikopour, E. Yi, A. Bayesteh, K. Au, M. Hawryluck, H. Baligh, and J. Ma, "SCMA for downlink multiple access of 5G wireless networks," in *Proc. IEEE Global Commun. Conf. (GLOBECOM)*, Austin, TX, USA, Dec. 2014, pp. 3940–3945.
- [69] U. Vilaipornsawai, H. Nikopour, A. Bayesteh, and J. Ma, "SCMA for open-loop joint transmission CoMP," in *Proc. IEEE 82nd Veh. Technol. Conf. (VTC-Fall)*, Boston, MA, USA, Sep. 2015, pp. 1–5.
- [70] T. Liu, X. Li, and L. Qiu, "Capacity for downlink massive MIMO MU-SCMA system," in *Proc. IEEE Int. Conf. Wireless Commun. Signal Process. (WCSP)*, Nanjing, China, Oct. 2015, pp. 1–5.
- [71] L. Lei, C. Yan, G. Wenting, Y. Huilian, W. Yiqun, and X. Shuangshuang, "Prototype for 5G new air interface technology SCMA and performance evaluation," *China Commun.*, vol. 12, no. 9, pp. 38–48, Sep. 2015.
- [72] Z. Yuan, G. Yu, and W. Li, "Multi-user shared access for 5G," *Telecommun. Netw. Technol.*, vol. 5, no. 5, pp. 28–30, May 2015.

- [73] X. Dai, S. Chen, S. Sun, S. Kang, Y. Wang, Z. Shen, and J. Xu, "Successive interference cancellation amenable multiple access (SAMA) for future wireless communications," in *Proc. IEEE Int. Conf. Commun. Syst. (IEEE ICCS)*, Nov. 2014, pp. 222–226.
- [74] L. Liu, J. Tong, and L. Ping, "Analysis and optimization of CDMA systems with chip-level interleavers," *IEEE J. Sel. Areas Commun.*, vol. 24, no. 1, pp. 141–150, Jan. 2006.
- [75] S. Chen, B. Ren, Q. Gao, S. Kang, S. Sun, and K. Niu, "Pattern division multiple access PDMA—A novel non-orthogonal multiple access for 5G radio networks," *IEEE Trans. Veh. Technol.*, vol. 66, no. 4, pp. 3185–3196, Apr. 2017.
- [76] Z. Yuan, G. Yu, W. Li, Y. Yuan, X. Wang, and J. Xu, "Multi-user shared access for Internet of Things," in *Proc. IEEE 83rd Veh. Technol. Conf. (VTC Spring)*, May 2016, pp. 1–5.
- [77] Y. Al-Eryani, E. Hossain, and D. I. Kim, "Generalized coordinated multi-point (GCoMP)-enabled NOMA: Outage, capacity, and power allocation," *IEEE Trans. Commun.*, vol. 67, no. 11, pp. 7923–7936, Nov. 2019.
- [78] V. K. Garg, *Wireless Communications & Networking*. San Mateo, CA, USA: Morgan Kaufmann, 2007.
- [79] L. Dai, B. Wang, Z. Ding, Z. Wang, S. Chen, and L. Hanzo, "A survey of non-orthogonal multiple access for 5G," *IEEE Commun. Surveys Tuts.*, vol. 20, no. 3, pp. 2294–2323, 3rd Quart., 2018.
- [80] D. Tse and P. Viswanath, *Fundamentals of Wireless Communication*. Cambridge, U.K.: Cambridge Univ. Press, 2005.
- [81] *Low Code Rate and Signature Based Multiple Access Scheme for New Radio*, document TSG RAN1 #85, 3GPP, Nanjing, China, May 2016.
- [82] *Discussion on Multiple Access for New Radio Interface*, document TSG RAN WG1 #84bis, 3GPP, Busan, South Korea, Apr. 2016.
- [83] *Initial Views and Evaluation Results on Non-Orthogonal Multiple Access for NR Uplink*, document TSG RAN WG1 #84bis, 3GPP, Busan, South Korea, Apr. 2016.
- [84] *Candidate NR Multiple Access Schemes*, document TSG RAN WG1 #84b, 3GPP, Busan, South Korea, Apr. 2016.
- [85] *Non-Orthogonal Multiple Access Candidate for NR*, document TSG RAN WG1 #85, 3GPP, Nanjing, China, May 2016.
- [86] K. Kusume, G. Bauch, and W. Utschick, "IDMA vs. CDMA: Analysis and comparison of two multiple access schemes," *IEEE Trans. Wireless Commun.*, vol. 11, no. 1, pp. 78–87, Jan. 2012.
- [87] *Considerations on DL/UL Multiple Access for NR*, document TSG RAN WG1 #84bis, 3GPP, Busan, South Korea, Apr. 2016.
- [88] *Non-Orthogonal Multiple Access for New Radio*, document TSG RAN WG1 #85, 3GPP, Nanjing, China, May 2016.
- [89] *New Uplink Non-Orthogonal Multiple Access Schemes for NR*, document TSG RAN WG1 #86, 3GPP, Gothenburg, Sweden, 2016.
- [90] *Initial LLS Results for UL Non-Orthogonal Multiple Access*, document TSG RAN WG1 #85, 3GPP, Nanjing, China, May 2016.
- [91] *Multiple Access Schemes for New Radio Interface*, document TSG RAN WG1 #84bis, 3GPP, Busan, South Korea, Apr. 2016.
- [92] W. Saad, M. Bennis, and M. Chen, "A vision of 6G wireless systems: Applications, trends, technologies, and open research problems," *IEEE Netw.*, vol. 34, no. 3, pp. 134–142, May/June 2020.



AHMED NIDHAM QASIM received the B.Sc. degree in computer communication engineering from Al-Rafidain University College, Iraq, in 2016, and the M.Sc. degree in electrical and electronics engineering from Istanbul Gelisim University, Turkey, in 2021. His research interests include wireless communication, 5G, and 6G.



MUHAMMET ALI KARABULUT (Member, IEEE) received the Ph.D. degree in electronics and communication engineering from Yildiz Technical University, Istanbul, Turkey, in 2021. He has been working as a Research and Teaching Assistant with the Department of Electronics and Communication Engineering, Yildiz Technical University, since 2013. His research interests include 5G, 6G, cooperative communication, and MAC protocols for VANETs.



HACI ILHAN (Senior Member, IEEE) received the B.Sc. degree in electronics and information engineering from Yildiz Technical University, Istanbul, Turkey, and the M.Sc. and Ph.D. degrees in electronics and information engineering from Istanbul Technical University, Istanbul. He was working as a Research and Teaching Assistant with the Department of Communication, Istanbul Technical University, from 2001 to 2011. Since 2011, he has been working as an Associate Professor with the Department of Electronics and Communication Engineering, Yildiz Technical University. His diverse research interests include communications theory and signal processing, with a concentration on wireless technologies, cooperative networking, MIMO communication methods, space-time coding, next-generation communication, and MAC protocols for VANETs are some of the specific study fields.



MD. BAHARUL ISLAM (Senior Member, IEEE) received the B.Sc. degree in computer science and engineering from RUET, Bangladesh, the M.Sc. degree in digital media from Nanyang Technological University, Singapore, and the Ph.D. degree in computer science from Multimedia University, Malaysia. He also received the Postdoctoral Study from the AI and Enhanced Vision Laboratory, Miller School of Medicine, University of Miami. He has more than 12 years of working experience



A. F. M. SHAHEN SHAH (Senior Member, IEEE) received the B.Sc. degree in electronics and telecommunication engineering from Daffodil International University, Bangladesh, in 2009, the M.Sc. degree in information technology from the University of Dhaka, Bangladesh, in 2011, and the Ph.D. degree in electronics and communication engineering from Yildiz Technical University, Turkey, in 2020. He worked as an Assistant Professor with the Department of Electrical and Electronics Engineering, Istanbul Gelisim University, Turkey, from 2020 to 2021. He also worked in industry for ten years, where he served as a higher management position. Since 2021, he has been working as an Assistant Professor with the Department of Electronics and Communication Engineering, Yildiz Technical University. He has authored a book. He has published a good number of research papers in international conferences and journals. His current research interests include wireless communication, artificial intelligence, 6G, blockchain, and cross-layer design. He is a Life Member of the Institution of Engineers, Bangladesh (IEB).

in cutting-edge research in image processing, computer vision, and communication systems. More than 45 international peer-reviewed research papers, including journal articles, conference proceedings, books, and book chapters, were authored or coauthored by him. His current research interests include 3-D computer vision, secure communication, and AR/VR-based vision rehabilitation. He secured three gold medals from three international scientific and technological competitions and received four best paper awards from different national and international conferences. The IEEE SPS Scientific Excellence Award 2018 has chosen the Ph.D. thesis as the best Ph.D. thesis. He awarded the Outstanding International Young Researchers Fellowship and Grant from the Scientific and Technological Research Council of Turkey (TUBITAK) that supports five postgraduate students' scholarship under his supervision. He has participated in over 15 international seminars, symposiums, and workshops as a member of the program/technical committee.

...