



Comparative analysis of the USA's Washington Ferries and road transport carbon emissions using the Trozzi and Vaccaro and Greatest Integer functions

Kadir Mersin¹ · Metin Yıldırım¹ · Andrew Adewale Alola^{2,3}

Received: 10 January 2023 / Accepted: 12 June 2023 / Published online: 28 June 2023
© The Author(s) 2023

Abstract

Countries' sectors are currently under great scrutiny for their response to the greenhouse gas (GHG) emission profile and the general effect of the sectoral activities on the environment. As in the agenda of all sectors, environmental concerns and investigations are of high importance in shipping and maritime transport. Amidst the rising forms of globalization, the need for sustainable transportation is constantly increasing. However, the machines that are the cornerstone of transportation largely depend on fossil fuels, thus resulting in environmental degradation. Notably, environmental-related degradation has continued to account for global warming, climate change, and ocean acidification. Shipping is considered the most environmentally friendly mode of transportation in terms of carbon dioxide (CO₂) emissions per ton per mile of transported unit load when compared against road transportation. In this study, six ferry lines (FLs) of Washington State Ferries were calculated to compare ship-generated carbon dioxide (CO₂) emissions with those from road transportation as if the carried vehicles had used the highway instead of transport by FL. While making these calculations, the Greatest Integer function (GIF) and Trozzi and Vaccaro function (TVF) were utilized. From the examined three scenarios, i.e., all passengers travel by car instead of ferry as scenario 1, all ferries carry both cars and passengers as scenario 2, and all car-free passengers travel by bus instead of ferry as scenario 3, the outlined results are as follows: (i) none of the cars were carried by the ferry, and car-free passengers preferred traveling by their own cars as observed in scenario 1; (ii) hypothetical scenarios (1 to 3) in which the road vehicles carried on FLs had instead used the highway, and the total potential CO₂ emissions of these road vehicles were calculated as 2,638,858.138, 704,958.2998, and 1,394,148.577 tonnes per year, respectively. Policy-wise, this study revealed the management strategies for CO₂ emissions reduction for two transport modes, shipping and road transportation, under current conditions.

Keyword Environmental sustainability · Road and waterways · Trozzi and Vaccaro function · Greatest Integer function · United States

Introduction

With the provision or access to mobility of humans, goods, and services, transportation is arguably the most essential connector. By recognizing the impact of transportation on fostering inclusive growth through creating more access to essential services and mitigating the growing global effect of climate change, intergovernmental agencies are not willing to relent in aiding the partnership of government and private institutions (World Bank, 2021a). However, there

remain many challenges to achieving a sustainable global transportation system. For instance, the World Bank (2021a) reported that one billion people still live more than 2 km from accessible road transportation systems, thus causing about one and half million deaths annually. Moreover, in spite of the growing benefits and contributions of the global transportation system, there are other far-reaching problems associated with the current model. Arguably, the climate change-related issues associated with the global transportation system are increasingly worrisome. For instance, the global contribution of greenhouse gas emissions from transportation amounts to 16% of the global GHG emissions amidst a \$15 billion annual cost of direct damages to the transportation infrastructure from natural disasters

Responsible Editor: Philippe Garrigues

Extended author information available on the last page of the article

(World Bank, 2021a). Specifically, in the world's largest economy, the United States, the energy sources mainly used for transport come from the burning of fossil fuels (mostly petrol, gasoline, and diesel); therefore, the sector contributed 29% of the country's 2019 total greenhouse gas emissions (United States Environmental Protection Agency, 2021).

Importantly, global warming, which accounts for the increase in average temperatures of land, sea, and air throughout the year, has continued to pose a serious challenge to the global transportation system. The reason is that the transportation networks across land, sea, and air are directly or indirectly impacted by the increase in the greenhouse gases (GHGs), i.e., CO₂, H₂O (water, which could be in the form of vapor), and CH₄ (methane, which is an organic compound), with the CO₂ emissions being the dominant contributor to global warming (Winnes et al., 2015). The global average surface temperature increased between 0.6 and 0.9 °C from 1906 to 2005, and the rate of temperature increase has almost doubled during this time range, especially within the last 50 years. According to a report from The National Oceanic and Atmospheric Administration's (NOAA) National Centres for Environmental Information (NCEI), nine of the world's 10 hottest summers have occurred since 2005 (NOAA, 2020). Moreover, five of these 10 summers have occurred since 2015. In 2019, the average temperature worldwide was 0.95 °C higher than the average temperature of the twentieth century and is only 0.04 °C lower than the highest recorded temperatures of 2016 (NOAA, 2020). With the COVID-19 pandemic that emerged in 2019, a decrease in (GHG) emissions has occurred that is largely associated with a slump in transportation logistics (Magazzino et al., 2021; World Bank, 2021b). By early June 2020, global daily fossil fuel CO₂ emissions were mostly back to 5% below 2019 levels (UN Environment Programme, 2020).

As identified in the literature, fossil fuels are mainly responsible for the increase of GHGs (Alola, 2019; Ike et al., 2020; Usman et al., 2020; Koyuncu et al., 2021; Onifade et al., 2021). Notably, vehicle-based CO₂ emissions are the largest factor driving the increase, which is especially the case for the United States transport sector (Umar et al., 2021). Therefore, the current study considers the case of the United States transportation sector because of its significant contribution to the country's greenhouse gas emission profile (United States Environmental Protection Agency, 2021). Specifically, this study considers the ferries and road transport systems in the state of Washington, whose transportation sector is the largest contributor to the state's total greenhouse gas emissions, amounting to about 99.6 million metric tons in 2018 (The Seattle Times, 2021; Reducing greenhouse gases, 2021). This study employs a novel approach for estimating the CO₂ emissions from vehicles, thereby providing a comparative analysis of the United

States' Washington Ferries and road transport systems. By using the Trozzi and Vaccaro function (TVF) and Greatest Integer functions (GIF), this study offers a new approach for the ship-based CO₂ emissions and is compared with the tier method that is employed for road vehicles. By so doing, the current study expectedly contributes to the existing literature, thus narrowing the gap in the transport-environmental sustainability literature.

Additional background information highlighted with relevant literature is provided in the “[Background: sectoral emissions](#)” section. In the “[Data collection and methods](#)” section, the dataset and empirical methods employed are presented in a specified order. While the results of the study are highlighted in the “[Results of the scenarios](#)” section, the results are discussed in the “[Discussion of results](#)” section. The summary of the study with relevant policy suggestions is offered in the “[Conclusion and policy implication](#)” section.

Background: sectoral emissions

Beginning with the use of carbon-based fuels in transportation, an increase in anthropogenic greenhouse gas emissions has been observed. As of 2019, greenhouse gas emissions were 6558 million metric tons of carbon dioxide equivalents in the United States. Of that value, 29% was produced by the transportation sector. This value caused the transportation sector to appear at the top of the greenhouse gas emission producer sectors list in the United States (Environmental Protection Agency, 2021). According to 2019 figures from the United States, more than two-thirds of human-caused greenhouse gas emissions were CO₂ emissions. The origin of 74% of GHG emissions and 92% of total anthropogenic CO₂ emissions is associated with the utilization of carbon-based fuels in the United States (Energy Information Administration (EIA), 2021). It is observed that the rate of anthropogenic GHG emissions increased in the time period between 2000 and 2010 and is much higher than the rate of increase seen in the previous three decades. As of 2010, anthropogenic greenhouse gas emissions reached 49 gigatons CO₂ per year, which was the highest figure in human history (Intergovernmental Panel on Climate Change, 2021). As of 2017, greenhouse gas emissions in the European Union were 4.483 megatons of CO₂e, which was 21.7% lower than 1990 values (European Environment Agency, 2019, 2021).

It is observed that studies on environmentally sustainable transportation strategies aiming to reduce greenhouse gas emissions are increasing. One approach proven to yield a decrease in GHG emissions is the use of renewable energy sources. The use of renewable energy in the transportation sector has been revealed as one of the reasons behind the increase in real disposable personal income, also causing a decrease in CO₂ emissions (Alola & Yildirim, 2019; Shafiei

& Salim, 2014). Environmentally sustainable transportation has been defined by The Organization of Economic Cooperation and Development (OECD) as “Transportation that does not endanger public health or ecosystems and meets mobility needs consistent with (a) use of renewable resources at below their rates of regeneration and (b) use of non-renewable resources at below the rates of development of renewable substitutes” (OECD, 1997).

Empirical literature highlight

Bouman et al. (2017) reviewed over 150 research papers related to GHG emissions reduction for the maritime transport sector. The authors concluded that GHG emissions could be reduced by a factor of 4–6 per freight unit transported by only using the currently available technologies (Bouman et al., 2017). It has been observed that the use of automatic mooring systems at RoRo/Pax ports causes a decrease in CO₂ emissions, and it is predicted that a 97% reduction can be achieved at RoRo/Pax ports (Díaz-Ruiz-Navamuel et al., 2018). Bridges over the straits are basically an alternative to short-sea shipping. Bridges over Dardanelle resulted in higher CO₂ emissions than those caused by the transit ships passing through Dardanelle (Mersin, 2020). When evaluating external costs of air emission, Lee et al. (2010) estimated that the use of short-sea transport instead of truck transportation is one of the most important alternatives for reducing external costs.

Additionally, Svindland and Hjelle (2019) demonstrated that increasing the ship size would not cause an increase in CO₂ efficiency in every case of short-sea transport. Christodoulou and Cullinane (2020) showed evidence of the environmental benefits of short-sea shipping. The technical and operational initiatives of shipping companies have been associated with the source of these benefits (Christodoulou & Cullinane, 2020). In a study conducted on ferry services to the islands, Baird and Pedersen (2013) indicated that CO₂ emissions would decrease if shorter sea routes were preferred over longer sea routes. However, another study on the comparison of approximately 900 short-sea shipping and road lines demonstrated that short-sea transport is not always more environmentally friendly than road transport, contrary to the popular generalization (Kotowska, 2015).

When comparing the result of CO₂ emissions from short-sea and road transportation in the Marmara region, Ülker et al. (2020) revealed that a CO₂ emission comparison should be conducted for each line and region before any conclusions can be made. Hjelle and Fridell (2012) showed in their study that whether Ro-Ro transport achieved lower CO₂ emissions compared to those of road transport mainly depended on the market situation that is attained with load factors. Given the result of Hjelle and Fridell (2012) analysis, it is clear that the use of both low-sulfur fuel and the latest abatement technologies

have not been sufficient for Ro-Ro transportation. As such, the study revealed that the outcome is not capable of providing superiority in environmental performance compared to road transport and that Ro-Ro ships should cruise well below their design speeds (Hjelle, 2011). Meanwhile, a study of the impact of both biomass energy and fossil fuel energy utilization in the entire transportation sector in the United States revealed interesting results (Umar et al., 2021). Notably, Umar et al. (2021) revealed that biomass energy utilization in the transport sector mitigates CO₂ emissions, while the utilization of fossil energy sources is responsible for a surge in CO₂ emissions.

In the present study, environmental performance with regard to CO₂ emissions of Washington State Ferry lines has been examined and compared with those of road transport systems. Given the uncommon direction employed when compared to existing literature, the study potentially makes a significant contribution to the body of knowledge available on the topic.

Data collection and methods

In this part of the study, the adopted method for estimating carbon emissions from transportation via Washington Ferries and road transportation are detailed with discussion of the results. However, we begin the description with the related dataset that is employed for the investigation.

Data collection

The Washington State Department of Transportation (2021a) website issues information about ferry lines and live ferry status. Frequency of the ferry lines are also shown on the website. A map of the Washington State Ferry lines is demonstrated in Fig. 1. Car capacity, passenger capacity, speed, and displacement of the vessels can be seen by visiting the above website, and the implemented information is outlined in Table 1 (Washington State Department of Transportation, 2021b).

Trozzi and Vaccaro method

A method for computing the total emissions of pollutants was introduced by and named after Trozzi and Vaccaro (1999). One advantage of this approach is its efficient use for the quantification of emissions and diffusion of pollutants that emanate from different environmental scenarios. The formula employed for the estimation method of CO₂ emissions is given in Eq. (1).

$$E(t_{\text{total}}) = \sum_{i=1}^3 C \times f \times t \times p_i \quad (1)$$

where

$E(t_{\text{total}})$: the total amount of CO₂ emissions for t -day sailing

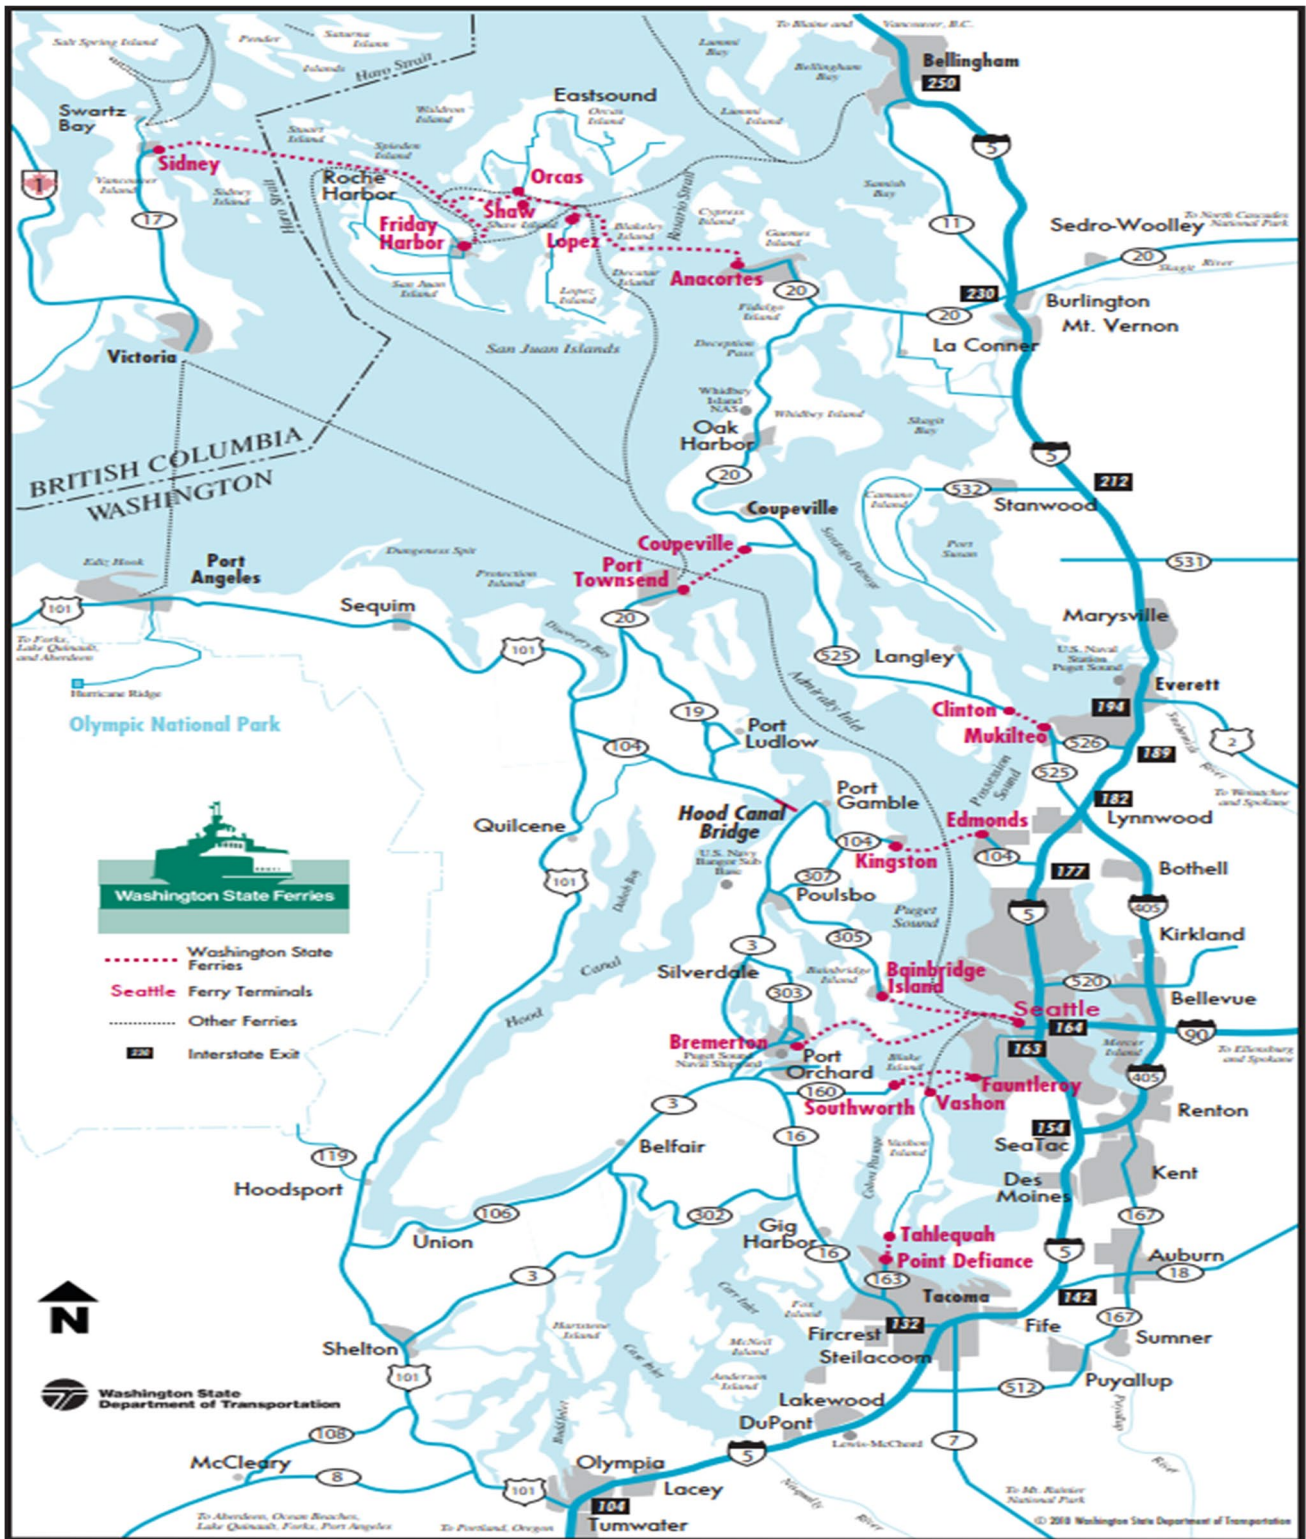


Fig. 1 Washington State Ferry lines

C : fuel consumption (tonne)
 $f = 3200$ kg/tonne (CO₂ emission factor)
 t : time (day)

p_1 : sailing mode multiplier (0.8)
 p_2 : maneuvering mode multiplier (0.4)
 p_3 : hotelling mode multiplier (0.2)

Table 1 Properties of Washington State Ferry vessels

Name	Displacement (tonne)	Speed (kt)	Car capacity	Passenger capacity	Route	Number of trips per year
Puyallup	6184	18	202	2500	Edmonds-Kingston	9464
Tacoma	6184	18	202	2500	Seattle-Bainbridge Island	8528
Walla Walla	4860	18	188	2000	Edmonds-Kingston	9100
Kaleetan	3634	17	144	2000	Seattle-Bremerton	6968
Yakima	3634	17	144	2000	Anacortes-San Juan Islands	7300
Chimacum	4384	17	144	1500	Seattle-Bremerton	5096
Samish	4384	17	144	1500	Anacortes-San Juan Islands	5475
Suquamish	4384	17	144	1500	Mukilteo-Clinton	5475
Tokitae	4384	17	144	1500	Mukilteo-Clinton	13104
Cathlamet	3310	16	124	1200	Fauntleroy-Vashon Island-Southworth	4004
Kitsap	3310	16	124	1200	Southworth-Fauntleroy-Vashon	14560
Sealth	3310	16	90	1200	Fauntleroy-Vashon-Southworth	5564
Kittitas	3310	16	124	1200	Mukilteo-Clinton	8528
Kennewick	2415	15.5	64	750	Port Townsend-Coupeville	7280
Salish	2415	15.5	64	750	Port Townsend-Coupeville	4368

According to the Washington State Department of Transportation website, some vessels are not listed in the schedule. Therefore, these vessels are not included in the calculations for this study

According to the above formula, three different situations should be examined while making calculations: sailing, port, and maneuvering. In this study, port and maneuvering emissions are neglected because the time variable is taken as days in the calculations. If port time and maneuvering time are converted to days, there will be little change in the calculations. Thus, these changes can be neglected.

Trozzi and Vaccaro function

Fuel consumption is the largest contributor to CO₂ emissions. There are some formulas for fuel consumption that neglect weight of the ship or changes in weight. By employing the approach from most recent studies, a new formula was built that does not neglect instant weight changing and shows the displacement tonnage at any time *t* (Mersin et al., 2017). Thus, we imply that $\nabla(t) = \left(\sqrt[3]{\nabla(0)} - \frac{\lambda v^3 t}{3}\right)^3$ and fuel

consumption for *t* day is $C(t) = \nabla(0) - \left(\sqrt[3]{\nabla(0)} - \frac{\lambda v^3 t}{3}\right)^3$, where ∇ is displacement of the ship, in other words, weight of the ship. *v* is speed of the vessel, $\nabla(0)$ is the initial displacement of the ship (at time *t* = 0), and λ is a parameter that is approximately equal to 1/120,000 for diesel machinery installation. Therefore, this formula can be written as $\nabla(0) - \left(\sqrt[3]{\nabla(0)} - \frac{v^3 t}{8640000}\right)^3$ for the hourly emission.

In this part of the study, a function is built by modifying the Trozzi and Vaccaro method. Accordingly, there is an emission factor for each exhaust gas such that the CO₂ emission factor is 3.2 tonnes per tonnes. Additionally, given the function modification, the mode multiplier is 0.8 for sailing such that daily emission can be computed by multiplying daily fuel consumption with emission factor for CO₂ and mode multiplier. In light of the above facts, for this study, the modified function from the TVF is expressed in Eq. (2) as

$$TVF(t) = \left[\nabla(0) - \left(\sqrt[3]{\nabla(0)} - \frac{v^3 t}{8640000} \right)^3 \right] \times 3.20 \times 0.80 = \left[\nabla(0) - \left(\sqrt[3]{\nabla(0)} - \frac{v^3 t}{8640000} \right)^3 \right] \times 2.56 \tag{2}$$

Calculation of potential CO₂ emissions of road vehicles (tier 1 method)

Tier emission calculation methods are divided into various levels according to their activity and technological features. Tier 1

is a method that requires less data compared to the tier 2 or tier 3 methods (Ülker et al., 2020). The tier 1 method can be used for CO₂ emission calculation if detailed features of the vehicle are not known. In this method, emission factors are based on fuel consumption for different vehicle types. The factors are

given in the EMEP/EEA Guidebook (2019). Accordingly, the formula of the tier 1 method is given in Eq. (3).

$$E_i = \sum_j \left(\sum_m \left(FC_{j,m} \times EF_{i,j,m} \right) \right) \quad (3)$$

E_i : emission of i pollutant (g)

$FC_{j,m}$: fuel consumption for the vehicle that is in category j and using fuel m (kg)

$EF_{i,j,m}$: emission from the pollutant i for vehicle category j and fuel m (g/kg)

In the United States, diesel-powered vehicles account for 4% of all motor vehicles (Chambers & Schmitt, 2015). Therefore, only gasoline cars and diesel-powered buses are considered in this study. Characteristic fuel consumption of cars and buses are assumed 70 g/km and 100 g/km, respectively, such that $EF_{i,j,m}$ is taken as 3.18 grams per gram of fuel consumption.

In light of the above facts, the tier 1 method can be modified as

$$E(\text{car}) = 3.18 \times 70 \times d = 222.6 \times d \quad (4)$$


$$E(\text{bus}) = 3.18 \times 100 \times d = 318 \times d \quad (5)$$

where $E(\text{car})$ and $E(\text{bus})$ are CO₂ emissions of a car and a bus, respectively. d is distance between two points. In this study, distances are acquired from <https://www.rome2rio.com/map/>.

Table 2 Annual ferry emission

Route	CO ₂ emissions (tonne)
Edmonds-Kingston	21,799.1011
Seattle-Bainbridge Island	22,086.3667
Seattle-Bremerton	8563.53482
Mukilteo-Clinton	27,101.9346
Fauntleroy-Southworth	14,632.8255
Port Townsend-Coupeville	4337.48604

Fig. 2 Annual ferry emissions (measured CO₂ emissions, tonne)

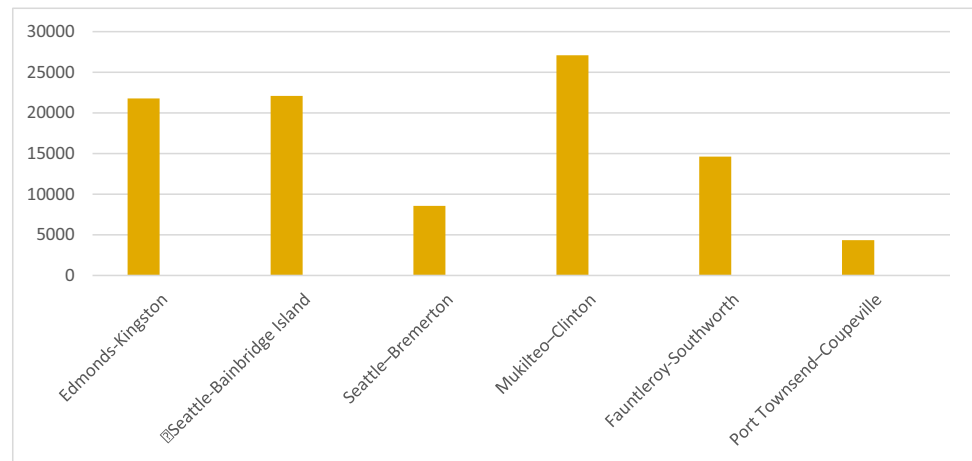

According to the function in Eq. (2), annual CO₂ emission of the ferries can be calculated. Thus, the annual emissions of ferry lines are given in Table 2 and graphically illustrated in Fig. 2.

Results of the scenarios

In scenario 1, it is assumed that all passengers travel by car instead of ferry and that each car has four passengers. In this case, the number of cars can be calculated by the Greatest Integer function (GIF). For all real numbers x , the Greatest Integer function returns the largest integer less than or equal to x . In essence, it rounds down a real number to the nearest integer. For example, GIF (3, 4) = 3, GIF (5) = 5.

According to Table 1, the number of cars that will be on the road can be calculated by Eq. (6), and results of the calculation are given in Table 3.

$$\text{NCR} = \text{GIF}(\text{NP} - 4 * \text{NC}/4) + 1. \quad (6)$$

where

NCR: number of cars that will be on the road

NP: number of passengers that are carried

NC: number of cars that are carried

Table 3 Number of cars that will be on the road for each trip

Route	Distance (km)	Number of car
Edmonds-Kingston	168.1	736
Seattle-Bainbridge Island	148.2	780
Seattle-Bremerton	104.5	355
Mukilteo-Clinton	169.2	408
Fauntleroy-Southworth	95.4	563
Port Townsend-Coupeville	339	124

Table 4 Annual car emission

Route	CO ₂ emissions (tonne)
Edmonds-Kingston	785,430.121
Seattle-Bainbridge Island	575,614.018
Seattle-Bremerton	123,943.734
Mukilteo-Clinton	704,347.846
Fauntleroy-Southworth	346,242.929
Port Townsend-Coupeville	103,279.49

According to Eq. (4), the potential annual CO₂ emissions from cars are given in Table 4 and Fig. 3. Of course, it is assumed that all cars have the same properties. For example, all cars have the same fuel consumption rate and are gasoline cars.

In scenario 2, all ferries carry both cars and passengers. In other words, ferries carry car-free passengers as well. In this scenario, it is assumed that all car-free passengers travel by bus instead of ferry and that each bus has 51 passengers. These assumptions are conceived from the information provided by the maritime activities (available at <https://wsdot.wa.gov/ferries>) in the examined cases. In this case, the number of buses that will be on the road is attained with the help of the GIF in Eq. (7) and outlined in Table 5.

$$NBR = \text{GIF}((NP - 4 \cdot NB) / 51) + 1. (7)$$

where

NCR: number of buses that will be on the road

NP: number of passengers that are carried

NB: number of buses that are carried

Produced from Eq. (5), the potential annual CO₂ emissions of buses is given in Table 6 and Fig. 4. Of course, it is assumed that all buses have the same properties. For example, all buses have the same fuel consumption rate and that all of them are diesel cars; this is an important assumption utilized in the computations.

In scenario 3, it is assumed that all car-free passengers travel by bus instead of ferry and that each bus has 51 passengers. Furthermore, none of the cars are carried by

Table 5 Number of buses that will be on the road for each trip

Route	Cars	Passengers	Number of buses
Edmonds-Kingston	390	4500	58
Seattle-Bainbridge Island	346	4500	62
Seattle-Bremerton	208	2250	28
Mukilteo-Clinton	268	2700	32
Fauntleroy-Southworth	338	3600	45
Port Townsend-Coupeville	64	750	10

Table 6 Annual bus emissions

Route	CO ₂ emissions (tonne)
Edmonds-Kingston	210,172.02
Seattle-Bainbridge Island	154,027.657
Seattle-Bremerton	33,538.5611
Mukilteo-Clinton	186,952.852
Fauntleroy-Southworth	92,369.842
Port Townsend-Coupeville	27,897.3677

ferry. For example, according to Table 5, 390 cars and 58 buses are carried per trip in Edmonds-Kingston Ferry line. In scenario 3, passengers preferred traveling by their own car or by bus instead of ferry. Of course, scenario 3 operates on the same assumption as scenario 1 and scenario 2, i.e., that the cars/buses exhibit the same energy consumption rates and utilize the same energy sources. The total annual emissions of this scenario (3) are given in Table 7 and Fig. 5.

Discussion of results

The existing literature on the subject of the study shows the necessity of comparing CO₂ emission values on the basis of ferry lines. In parallel with the studies in the existing

Fig. 3 Annual car emissions (measured CO₂ emissions, tonne)

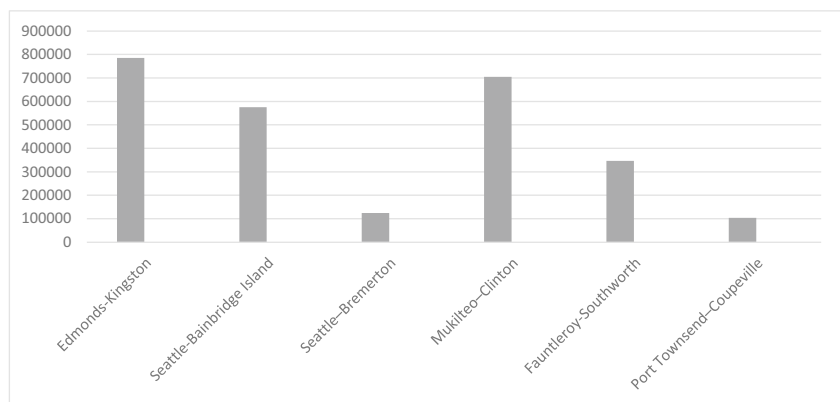


Fig. 4 Annual bus emissions (measured CO₂ emissions, tonne)

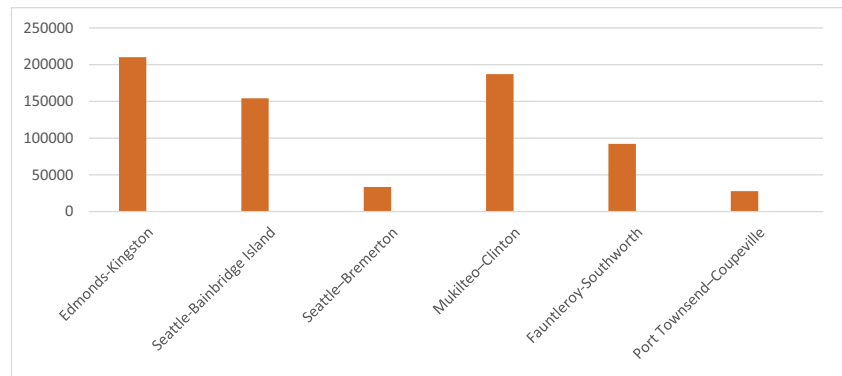


Table 7 Total annual emissions of scenario 3

Route	CO ₂ emissions (tonne)
Edmonds-Kingston	409,006.664
Seattle-Bainbridge Island	284,176.231
Seattle-Bremerton	66,659.3736
Mukilteo-Clinton	392,115.688
Fauntleroy-Southworth	188,433.4
Port Townsend-Coupeville	53,757.2206

literature, this study includes six different Washington State Ferry lines and provides a separate evaluation made for each line. Three possible basic alternatives have been identified in the use of road transportation, but the first two alternatives consist of sole usage of private and public transportation vehicles, namely, cars and buses. The last alternative consists of usage of cars and buses at the same time. Comparison between relevant alternatives has been conducted on full load assumption of ferries. Three scenarios are created, and each of them are compared with emissions caused by ferries, which is shown with the yellow row in Fig. 6.

According to scenario 1, none of the cars are carried by the ferry, and car-free passengers preferred traveling with their own cars. Annual emissions caused by scenario 1 are shown with the gray row in Fig. 6. Scenario 2 occurs

when all passengers preferred traveling by buses. The annual emissions caused by scenario 2 are shown with the orange row in Fig. 6. Finally, scenario 3 is the case when none of the cars are carried by the ferry, and car-free passengers preferred traveling by buses. The annual emissions caused by scenario 3 are shown with the blue row in Fig. 6.

In the hypothetical scenarios 1, 2, and 3 where the road vehicles carried on FLs had used the highway, the total potential CO₂ emissions of these road vehicles are calculated as 2,638,858.138, 704,958.2998, and 1,394,148.577 tonnes per year, respectively. The values observed from the investigation point led to a series of important conclusions and recommendations. The first observed point is that the CO₂ emission ranking of the transportation options is the same for each of the six ferry lines. Studies from the literature have emphasized that in CO₂ emission comparisons, differences might be detected on the basis of lines and that it is necessary to perform separate analysis for each line (Baird & Pedersen, 2013; Cooper, 2001; Pizzol, 2019; Ančić et al., 2020). For instance, Baird and Pedersen (2013) found a significant difference in the CO₂ emissions between the long-range ferry services (using the route from Aberdeen to Orkney Islands) and the short-range ferry services (across the Pentland Firth). Although the short-range ferry services consisted of a longer road journey for vehicles than the long-range ferry services,

Fig. 5 Total annual emissions (measured CO₂ emissions, tonne) of scenario 3


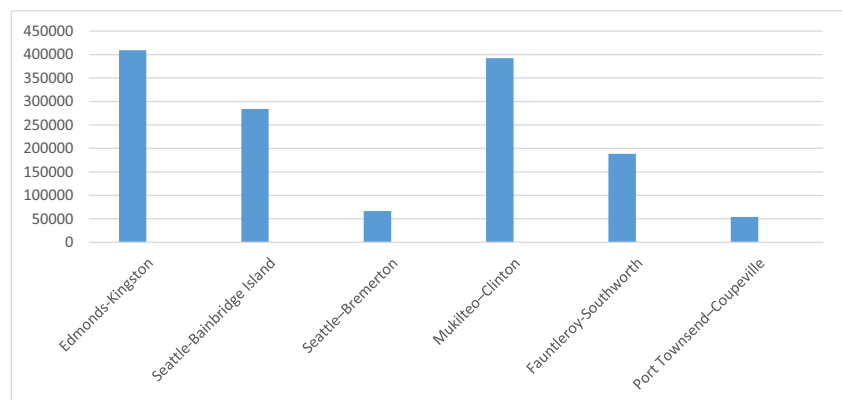


Fig. 6 Comparison of annual emissions (measured CO₂ emissions, tonne)

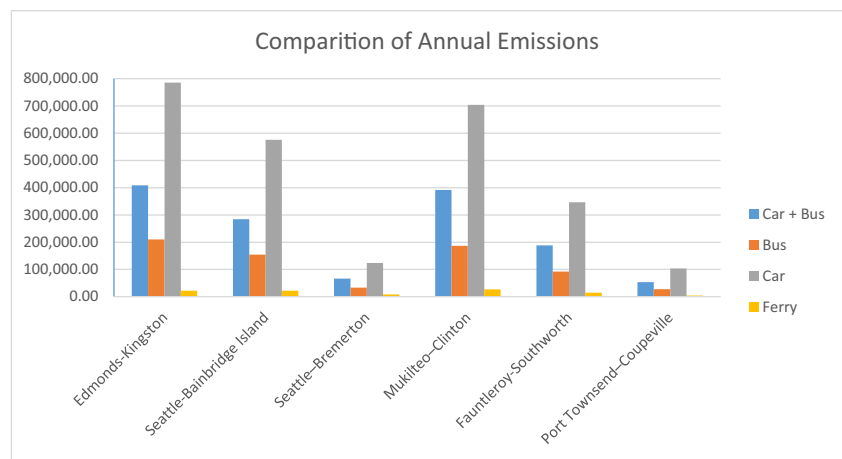

findings revealed that there are greater CO₂ emissions for the long-range ferry services. Additionally, Cooper (2001) compared the pollutant emissions from three different on-board high-speed passenger ferries that are all marine diesel engines and characterized with the following: the first one uses conventional, medium-speed; the second one is a gas turbine engine; and the third one is a conventional, medium-speed equipped with selective catalytic reduction (SCR) systems for NO_x abatement. The result revealed that the second ship showed lower emissions of NO_x, PM, and PAH but not without higher fuel utilization and CO₂ emissions. However, in the current study, the relevant situation was not determined. The results of the investigation yield the same conclusion for all the investigated ferry lines. Another important point revealed by the results of the analysis is that maritime transport causes the lowest CO₂ emissions on the relevant lines among other options. It should be noted that the calculations have been conducted on the maximum capacity for ferries. The figures show that higher CO₂ emission values will be endured if different road transport alternatives are preferred over ferries for the investigated lines. This situation supports the previous studies, which state the importance of high load factor requirements at short-sea transportation in order to achieve lower CO₂ emissions when compared to alternative transportation modes (Jebli & Belloumi, 2017; Ülker et al., 2020; Dujmović et al., 2022). Specifically, the investigation by Ülker et al. (2020) showed interesting results when comparison is made between CO₂ emissions from short-sea shipping and road transportation in a Turkish region. The investigation showed that the total emission budget of the examined Ro-Ro and ferry lines is higher than the potential CO₂ emissions of the vehicles being carried. Thus, the study established that carbon emissions can be minimized by shifting trucks from the highway to the seaway. Meanwhile, among the other three scenarios in which highway alternatives are examined, the bus-only scenario has the lowest CO₂ emissions.

Conclusion and policy implication

Looking at the existing literature about the current study, there is a necessity to compare the CO₂ emission values on ferry line basis with road transportation. The case with the United States is crucial due to the economic prowess and carbon emission profile of the country. Considering this motivation, the current study examines six different Washington State Ferry lines (because of their importance in the country) by using a separate evaluation for each ferry line. Additionally, three possible basic alternatives were identified in the use of road transportation, where the first two alternatives consist of sole usage of private and public transportation vehicles, namely, cars and buses. The last alternative consists of usage of cars and buses at the same time. Importantly, the result revealed that road vehicles carried on FLs had instead used the highway such that the total potential CO₂ emissions of these road vehicles are respectively computed as 2,638,858.138, 704,958.2998, and 1,394,148.577 tonnes per year. Comparison between relevant alternatives was carried out on full load assumption of ferries on one hand and road transportation on the other. In a novel approach, the study adopted the Trozzi and Vaccaro function and Greatest Integer function; as such, the results offer relevant policy implications with notable research limitations and recommendations.

Policy and recommendations for future study

Considering that the state of Washington produces a desirable amount of carbon-free electricity that potentially meets about 90% of its demand (Washington Policy Center, 2020), a sector-specific legislation that is aimed at achieving such desirable success could be formulated to prevent transport emissions. Additionally, to complement the state's more recent transport-related emission regulations (such as the Clean Car Law, Zero Emission

Vehicle (ZEV) standard, and the Clean Fuel Standard), more partnership with the private sector could offer significant energy and climate finance, such as the Volkswagen Federal and State settlements (Reducing greenhouse gases, 2021). Moreover, in order to consistently reduce carbon emissions in both maritime and land transportation modes, there should be incentives for sea and land users to optimize the shortest possible routes.

The current study deals with carbon emissions in maritime and land transportation; other greenhouse gases and/or pollutant emissions could be considered in a similar research framework. Moreover, provided there is no data limitation, the study could be extended to other states and/or other economies.

Author contribution Andrew Adewale Alola: writing—review and editing, visualization, and correspondence.

Metin Yıldırım: writing—review and editing and validation.

Kadir Mersin: investigation, methodology, and formal analysis.

Funding Open access funding provided by Inland Norway University Of Applied Sciences

Data availability Data are available upon request from the corresponding author.

Material availability Not applicable.

Declarations

Ethical approval Not applicable.

Consent to participate Not applicable.

Consent for publication Not applicable.

Competing interests The authors declare no competing interests.

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.


References

- Alola AA (2019) The trilemma of trade, monetary and immigration policies in the United States: accounting for environmental sustainability. *Sci Total Environ* 658:260–267
- Alola A, Yildirim H (2019) The renewable energy consumption by sectors and household income growth in the United States. *Int J Green Energy* 16:1414–1421
- Ančić I, Perčić M, Vladimir N (2020) Alternative power options to reduce carbon footprint of ro-ro passenger fleet: a case study of Croatia. *J Clean Prod* 271:122638
- Baird A, Pedersen R (2013) Analysis of CO₂ emissions for island ferry services. *J Transp Geogr* 32:77–85
- Bayırhan İ, Mersin K, Tokuşlu A, Gazioglu C (2019) Modelling of ship originated exhaust gas emissions in the strait of Istanbul (Bosphorus). *Int J Geoinformatics* 6(3):238–243
- Bouman E, Lindstad E, Riialand A, Strømman A (2017) State-of-the-art technologies, measures, and potential for reducing GHG emissions from shipping – a review. *Transp Res D Transp Environ* 52:408–421
- Buhaug Ø, Corbett JJ, Endersen Ø, Eyring V, Faber J, Hanayama S, Lee DS, Lee D, Lindstad H, Markowska AZ, Mjelde A, Nelissen D, Nilsen J, Pålsson C, Winebrake JJ, Wu W-Q, Yoshida K (2009) Updated study on greenhouse gas emissions from ships. In: Second IMO GHG study. International Maritime Organization, London, UK
- Chambers M, Schmitt R (2015) Diesel-powered passenger cars and light trucks. U.S. Department of Transportation Bureau of Transportation Statistics
- Christodoulou A, Cullinane K (2020) Potential of, and drivers for, private voluntary initiatives for the decarbonisation of short sea. *Marit Econ Logist* 23:632–654
- Cohen AJ, Ross Anderson H, Ostro B, Pandey KD, Krzyzanowski M, Künzli N, Gutschmidt K, Pope A, Romieu I, Samet JM, Smith K (2005) The global burden of disease due to outdoor air pollution. *J Toxicol Environ Health, Part A* 68(13–14):1301–1307
- Cooper DA (2001) Exhaust emissions from high speed passenger ferries. *Atmos Environ* 35(24):4189–4200
- Corbett JJ, Winebrake JJ, Green EH, Kasibhatla P, Eyring V, Lauer A (2007) Mortality from ship emissions: a global assessment. *Environ Sci Technol* 41(24):8512–8518
- Deniz C, Kılıç A (2009) Estimation and assessment of shipping emissions in the region. *Environ Prog Sustain* 29(1):107–115
- Díaz-Ruiz-Navamuel E, Piris A, Perez-Labajos C (2018) Reduction in CO₂ emissions in RoRo/Pax ports equipped with automatic mooring systems. *Environ Pollut* 241:879–886
- Dujmović J, Krljan T, Lopac N, Žuškin S (2022) Emphasis on occupancy rates in carbon emission comparison for maritime and road passenger transportation modes. *J Mar Sci Eng* 10(4):459
- Endresen Ø, Sjørgård E, Sundet JK, Dalsøren SB, Isaksen IS, Berglen TF, Gravr G (2003) Emission from international sea transportation and environmental impact. *J Geophys Res Atmos* 108(D17). <https://doi.org/10.1029/2002JD002898>
- Energy Information Administration (EIA) (2021) Energy and the environment explained. Energy Information Administration (EIA), U.S <https://www.eia.gov/energyexplained/energy-and-the-environment/where-greenhouse-gases-come-from.php>
- Environmental Protection Agency (2021) Sources of Greenhouse Gas Emissions, U.S <https://www.epa.gov/ghgemissions/sources-greenhouse-gas-emissions>. (Accessed 20 January 2022)
- European Environment Agency (2021) Total greenhouse gas emission trends and projections in Europe. <https://www.eea.europa.eu/data-and-maps/indicators/greenhouse-gas-emission-trends-6/assessment-3>. (Accessed 10 January 2022)
- European Environment Agency (2019). Air pollutant emission inventory guidebook 2019; Technical guidance to prepare national emission inventories. (2019). <https://www.eea.europa.eu/publications/emep-eea-guidebook-2019>. (Accessed 10 January 2022).
- Goldsworthy L, Goldsworthy B (2015) Modelling of ship engine exhaust emissions in ports and extensive coastal waters based on terrestrial AIS data-An Australian case study. *Environ Model Softw* 63:45–60
- Hjelle HM (2011) The double load factor problem of Ro-Ro shipping. *Marit Policy Manag* 38:235–249

- Hjelle H, Fridell E (2012) When is short sea shipping environmentally competitive? In: Oosthuizen J (ed) *Environmental Health - Emerging Issues and Practice*. InTech Open, London, pp 3–20
- Ike GN, Usman O, Alola AA, Sarkodie SA (2020) Environmental quality effects of income, energy prices and trade: the role of renewable energy consumption in G-7 countries. *Sci Total Environ* 721:137813
- Intergovernmental Panel on Climate Change (2021) Climate change 2014 mitigation of climate change. In: *About the IPCC The Intergovernmental Panel on Climate Change* https://www.ipcc.ch/site/assets/uploads/2018/02/ipcc_wg3_ar5_full.pdf. (Accessed 20 January 2022)
- Jebli MB, Belloumi M (2017) Investigation of the causal relationships between combustible renewables and waste consumption and CO2 emissions in the case of Tunisian maritime and rail transport. *Renewable Sustainable Energy Rev* 71:820–829
- Kotowska I (2015) The role of ferry and Ro-Ro shipping in sustainable development of transport. *Rev Econ Perspect* 15:35–48
- Koyuncu T, Beşer MK, Alola AA (2021) Environmental sustainability statement of economic regimes with energy intensity and urbanization in Turkey: a threshold regression approach. *Environ Sci Pollut Res* 28:42533–42546
- Lee PT, Hu KC, Chen T (2010) External costs of domestic container transportation: short-sea shipping versus trucking in Taiwan. *Transp Rev* 30:315–335
- Lonati G, Cernuschi S, Sidi S (2010) Air quality impact assessment of at-berth ship emissions: case-study for the project of a new freight port. *Sci Total Environ* 409(1):192–200
- López-Aparicio S, Tønnesen D, Thanh TN, Neilson H (2015) Shipping emissions in a Nordic port: assessment of mitigation strategies. *Transp Res D* 53:205–216
- Magazzino C, Alola AA, Schneider N (2021) The trilemma of innovation, logistics performance, and environmental quality in 25 top-most logistics countries: a quantile regression evidence. *J Clean Prod* 322:129050. <https://doi.org/10.1016/j.jclepro.2021.129050>
- Mersin K, Mısrhoğlu T, Alkan G (2017) A new method for calculating fuel consumption and displacement of a ship in maritime transport. *Cogent Eng* 4:1415107
- Mersin K (2020) Review of total emission of transit ships in the Dardanelle which including possible CO2 emission of 1915 Canakkale Bridge. *Therm Sci* 24:391–398
- NOAA (2020). 2019 was 2nd-hottest year on record for Earth say NOAA, NASA. <https://www.noaa.gov/news/2019-was-2nd-hottest-year-on-record-for-earth-say-noaa-nasa>
- OECD (1997). *Towards sustainable transportation. the Vancouver conference, Vancouver, British Columbia, 24–27 March 1996: conference highlights and overview of issues*. OECD, Paris. (Accessed 10 January 2022).
- Onifade ST, Alola AA, Erdoğan S, Acet H (2021) Environmental aspect of energy transition and urbanization in the OPEC member states. *Environ Sci Pollut Res* 28(14):17158–17169
- Popa C, & Filorin N (2014) Shipping air pollution assessment. Study Case on Constanta Port. *14th International Multidisciplinary Scientific GeoConference SGEM 2014*
- Reducing greenhouse gases (2021). Department of Ecology of State of Washington (2021). <https://ecology.wa.gov/Air-Climate/Climate-change/Greenhouse-gases/Reducing-greenhouse-gases>
- Pizzol M (2019) Deterministic and stochastic carbon footprint of intermodal ferry and truck freight transport across Scandinavian routes. *J Clean Prod* 224:626–636
- Saraçoğlu H, Deniz C, Kılıç A (2013) An investigation on the effects of ship sourced emissions in Izmir port, Turkey. *Sci World J* 2013:218324
- Shafiei S, Salim RA (2014) Non-renewable and renewable energy consumption and CO2 emissions in OECD countries: a comparative analysis. *Energy Policy* 66:547–556
- Song S (2014) Ship emissions inventory, social cost and eco-efficiency in Shanghai Yangshan port. *Atmos Environ* 82:288–297
- Svindland M, Hjelle HM (2019) The comparative CO2 efficiency of short sea container transport. *Transp Res D Transp Environ* 77:11–20
- The Seattle Times (2021) Washington state greenhouse gas emissions rose in 2018 due to transportation. <https://www.seattletimes.com/seattle-news/environment/washington-state-greenhouse-gas-emissions-rose-in-2018-due-to-transportation/>
- Tokuşlu A (2020) Analyzing the energy efficiency design index (EEDI) performance of a container ship. *Int J Geoinformatics* 7(2):114–119
- Trozzi C, & Vaccaro R (1999) Methodologies for estimating future air pollutant emissions from ships. *Techne Report MEET RF98b*.
- Ülker D, Bayırhan İ, Mersin K, Gazioglu C (2020) A comparative CO2 emissions analysis and mitigation strategies of short-sea shipping and road transport in the Marmara Region. *Carbon Manag* 12(1):1–2. <https://doi.org/10.1080/17583004.2020.1852853>
- Umar M, Ji X, Kirikkaleli D, Alola AA (2021) The imperativeness of environmental quality in the United States transportation sector amidst biomass-fossil energy consumption and growth. *J Clean Prod* 285:124863
- UN Environment Programme. (2020). <https://www.unep.org/>. (Accessed 20 January 2022).
- Usman O, Alola AA, Sarkodie SA (2020) Assessment of the role of renewable energy consumption and trade policy on environmental degradation using innovation accounting: evidence from the US. *Renew Energy* 150:266–277
- Viana M, Hamming P, Colette A, Querol X, Degraeuwe B, de Vlieger I, Van Aardenne J (2014) Impact of maritime transport emissions on coastal air quality in Europe. *Atmos Environ* 90:96–105
- Wang C, Corbett JJ, Firestone J (2008) Modeling energy use and emissions from North American shipping: application of ship traffic, energy and environment model. *Environ Sci Technol* 41(9):3226–3232
- Washington Policy Center (2020) New CO2 data expose waste, failure in WA state climate policies. Washington Policy Center <https://www.washingtonpolicy.org/publications/detail/new-data-show-washingtons-co2-emissions-continued-to-increase-in-2018-to-highest-level-in-a-decade>
- Washington State Department of Transportation (2021a) Vessels by class. <https://wsdot.com/ferries/vesselwatch/Vessels.aspx>. (Accessed 20 January 2022)
- Washington State Department of Transportation (2021b) Washington State Ferries. <https://wsdot.wa.gov/ferries>. (Accessed 20 January 2022)
- Winnes H, Styhre L, Fridell E (2015) Reducing GHG emissions from ships in port areas. *Res Transp Bus Manag* 17:73–82. <https://doi.org/10.1016/j.rtbm.2015.10.008>
- World Bank (2021a). <https://www.worldbank.org/en/topic/transport>. (Accessed 20 January 2022)
- World Bank (2021b) Earth Day 2020: Could COVID-19 be the tipping point for transport emissions?. https://www.worldbank.org/en/news/feature/2020/04/22/earth-day-2020-could-covid-19-be-the-tipping-point-for-transportemissions?cid=tai_tt_transport_en_ext (Accessed 20 January 2022)

Publisher's note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Authors and Affiliations

Kadir Mersin¹ · Metin Yıldırım¹ · Andrew Adewale Alola^{2,3} 

✉ Andrew Adewale Alola
andrew.alola@hotmail.com

Kadir Mersin
kmersin@gelisim.edu.tr

Metin Yıldırım
meyildirim@gelisim.edu.tr

² CREDS-Centre for Research on Digitalization and Sustainability, Inland Norway University of Applied Sciences, 2418 Elverum, Norway

³ Faculty of Economics, Administrative and Social Sciences, Nisantasi University, Istanbul, Turkey

¹ Logistics Management, Faculty of Economics, Administrative and Social Sciences, Istanbul Gelisim University, Istanbul, Turkey

Terms and Conditions

Springer Nature journal content, brought to you courtesy of Springer Nature Customer Service Center GmbH (“Springer Nature”).

Springer Nature supports a reasonable amount of sharing of research papers by authors, subscribers and authorised users (“Users”), for small-scale personal, non-commercial use provided that all copyright, trade and service marks and other proprietary notices are maintained. By accessing, sharing, receiving or otherwise using the Springer Nature journal content you agree to these terms of use (“Terms”). For these purposes, Springer Nature considers academic use (by researchers and students) to be non-commercial.

These Terms are supplementary and will apply in addition to any applicable website terms and conditions, a relevant site licence or a personal subscription. These Terms will prevail over any conflict or ambiguity with regards to the relevant terms, a site licence or a personal subscription (to the extent of the conflict or ambiguity only). For Creative Commons-licensed articles, the terms of the Creative Commons license used will apply.

We collect and use personal data to provide access to the Springer Nature journal content. We may also use these personal data internally within ResearchGate and Springer Nature and as agreed share it, in an anonymised way, for purposes of tracking, analysis and reporting. We will not otherwise disclose your personal data outside the ResearchGate or the Springer Nature group of companies unless we have your permission as detailed in the Privacy Policy.

While Users may use the Springer Nature journal content for small scale, personal non-commercial use, it is important to note that Users may not:

1. use such content for the purpose of providing other users with access on a regular or large scale basis or as a means to circumvent access control;
2. use such content where to do so would be considered a criminal or statutory offence in any jurisdiction, or gives rise to civil liability, or is otherwise unlawful;
3. falsely or misleadingly imply or suggest endorsement, approval, sponsorship, or association unless explicitly agreed to by Springer Nature in writing;
4. use bots or other automated methods to access the content or redirect messages
5. override any security feature or exclusionary protocol; or
6. share the content in order to create substitute for Springer Nature products or services or a systematic database of Springer Nature journal content.

In line with the restriction against commercial use, Springer Nature does not permit the creation of a product or service that creates revenue, royalties, rent or income from our content or its inclusion as part of a paid for service or for other commercial gain. Springer Nature journal content cannot be used for inter-library loans and librarians may not upload Springer Nature journal content on a large scale into their, or any other, institutional repository.

These terms of use are reviewed regularly and may be amended at any time. Springer Nature is not obligated to publish any information or content on this website and may remove it or features or functionality at our sole discretion, at any time with or without notice. Springer Nature may revoke this licence to you at any time and remove access to any copies of the Springer Nature journal content which have been saved.

To the fullest extent permitted by law, Springer Nature makes no warranties, representations or guarantees to Users, either express or implied with respect to the Springer nature journal content and all parties disclaim and waive any implied warranties or warranties imposed by law, including merchantability or fitness for any particular purpose.

Please note that these rights do not automatically extend to content, data or other material published by Springer Nature that may be licensed from third parties.

If you would like to use or distribute our Springer Nature journal content to a wider audience or on a regular basis or in any other manner not expressly permitted by these Terms, please contact Springer Nature at

onlineservice@springernature.com